




35 HP Pneumatic Engine Starter Kit

Starter Kit

Outline & Interface Dimensions of 35 HP (26kw) Pneumatic Engine Starter Kit

Shut-off valve, relay valve, muffler, lubricator & pushbutton control valve are furnished but not shown. User must supply all pipe, hose, & a 100 gal. [397 L] min. air tank with 1-1/2" NPT outlet, at 125 psig [8.6 bar] min., 150 psig [10.3 bar] max.

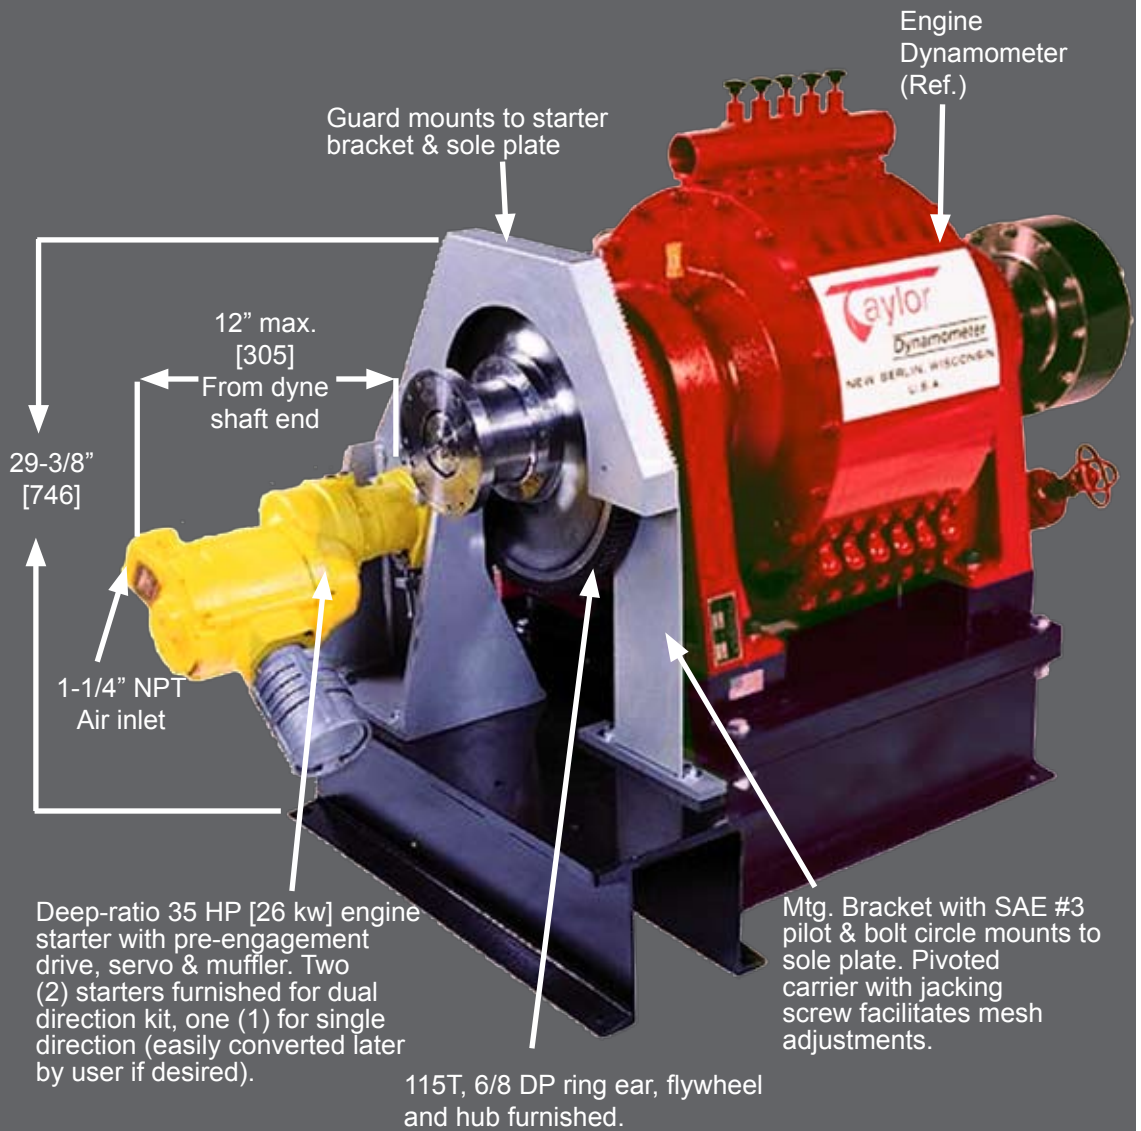

Application: Starting IC engine (4-stroke & 2-stroke diesel thru 3000 IN3 [49L]), thru engine dynamometer at 60°F [16° C] and above.

[mm]