




1880 Driveshaft

Driveshaft

Notes:

1. Continuous load rating = 5,000 lb-ft [6,779 Nm] with no angular misalignment & $2^\circ \pm 1^\circ$ slope (parallel offset between 1/2 in. [13 mm] & 1-1/2 in. [40mm]).
2. Maximum Recommended Short Duration Load = 8,900 lb-ft [12,000 Nm] with no angular misalignment & $2^\circ \pm 1^\circ$ slope (parallel offset between 1/2 in. [13 mm] & 1-1/2 in. [40mm]).
3. Minimum Elastic Limit = 16,000 lb-ft [21690 Nm] represents the maximum torque load the universal joint will transmit instantaneously without brinelling bearings or yield in any part
4. Maximum Allowable Speed = 4,000 RPM
5. Dynamically balanced
6. Weight—150 lb [68 kg., 667 N.]

27.44 in. [697 mm] Min. Collapsed
30.94 in. [786 mm] Max. Extended

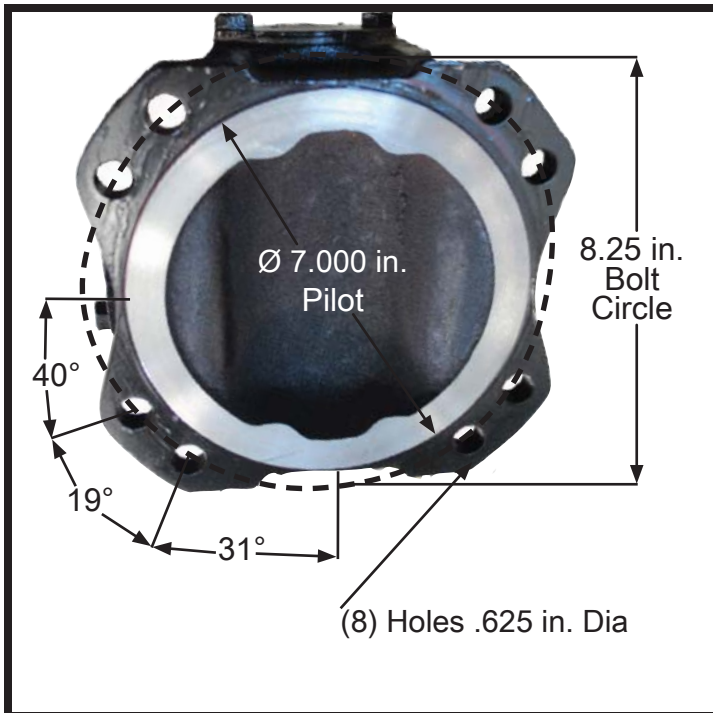

SMS0672V006