



Chassis Dynamometer

TD-36X3

Chassis Dynamometer




Specifications

Weight Capacity: 30,000 lb (13,608 kg) per axle
Roll Brakes: Pneumatically actuated disc
Shipping Weight: 22,000 lb (9979kg)
Capacity: 1,650 hp (1,230kw) @ 45 mph (72 Km/h)
Rolls: 36" (915 mm) by 31" (787 mm) long,
Pit Required Depth: 35" (889 mm)


Recommended Accessories:

- Calibration Weights
- Stone Guard
- Exhaust Canopy
- Underbelly Exhaust
- Water Recirculating System
- Guard Rail
- Wheel Chocks
- Cooling

TD-36x3 Power Curve, English

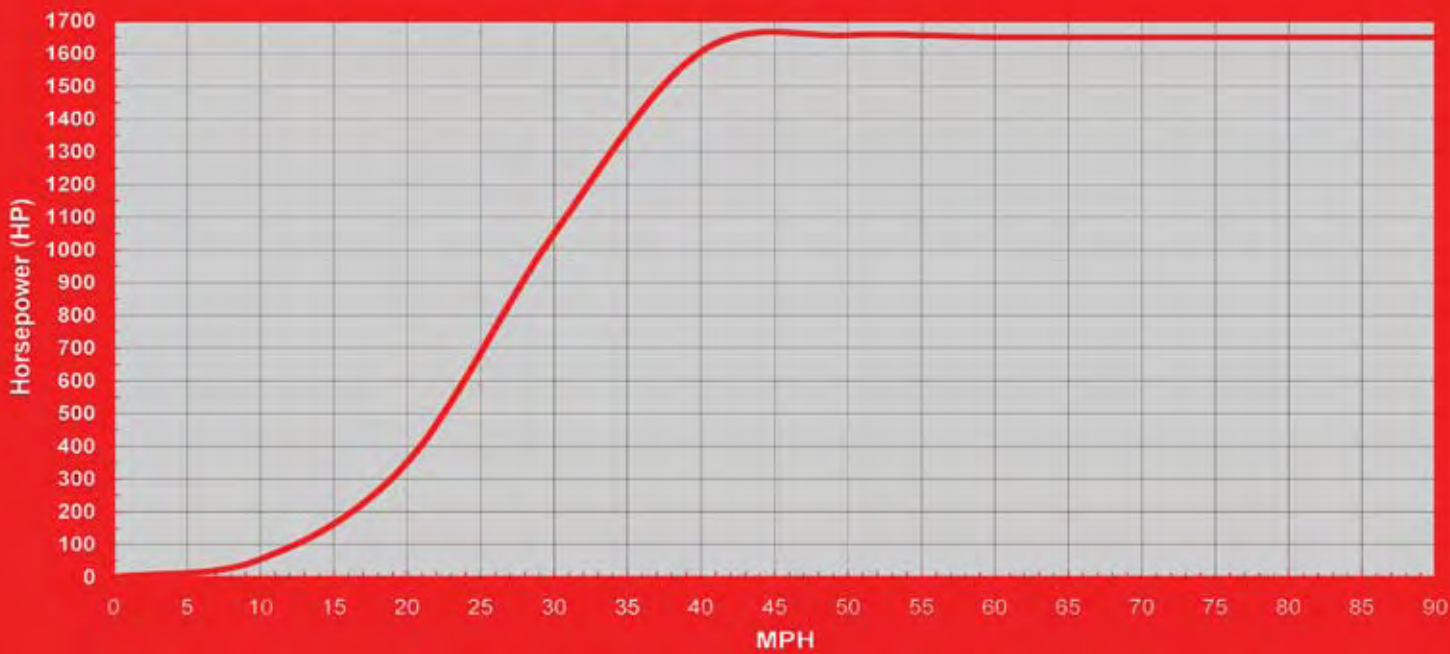


TD-36x3 Power Curve, Metric

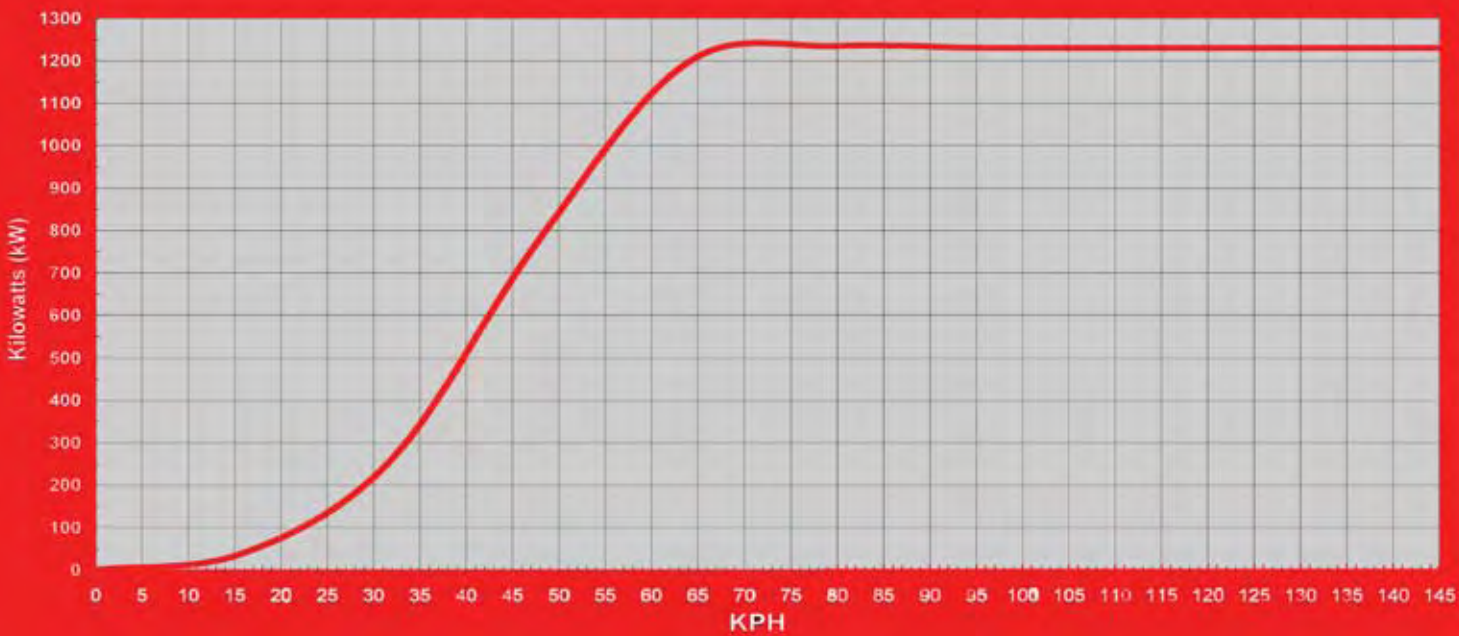

TD-36X3

Chassis Dynamometer

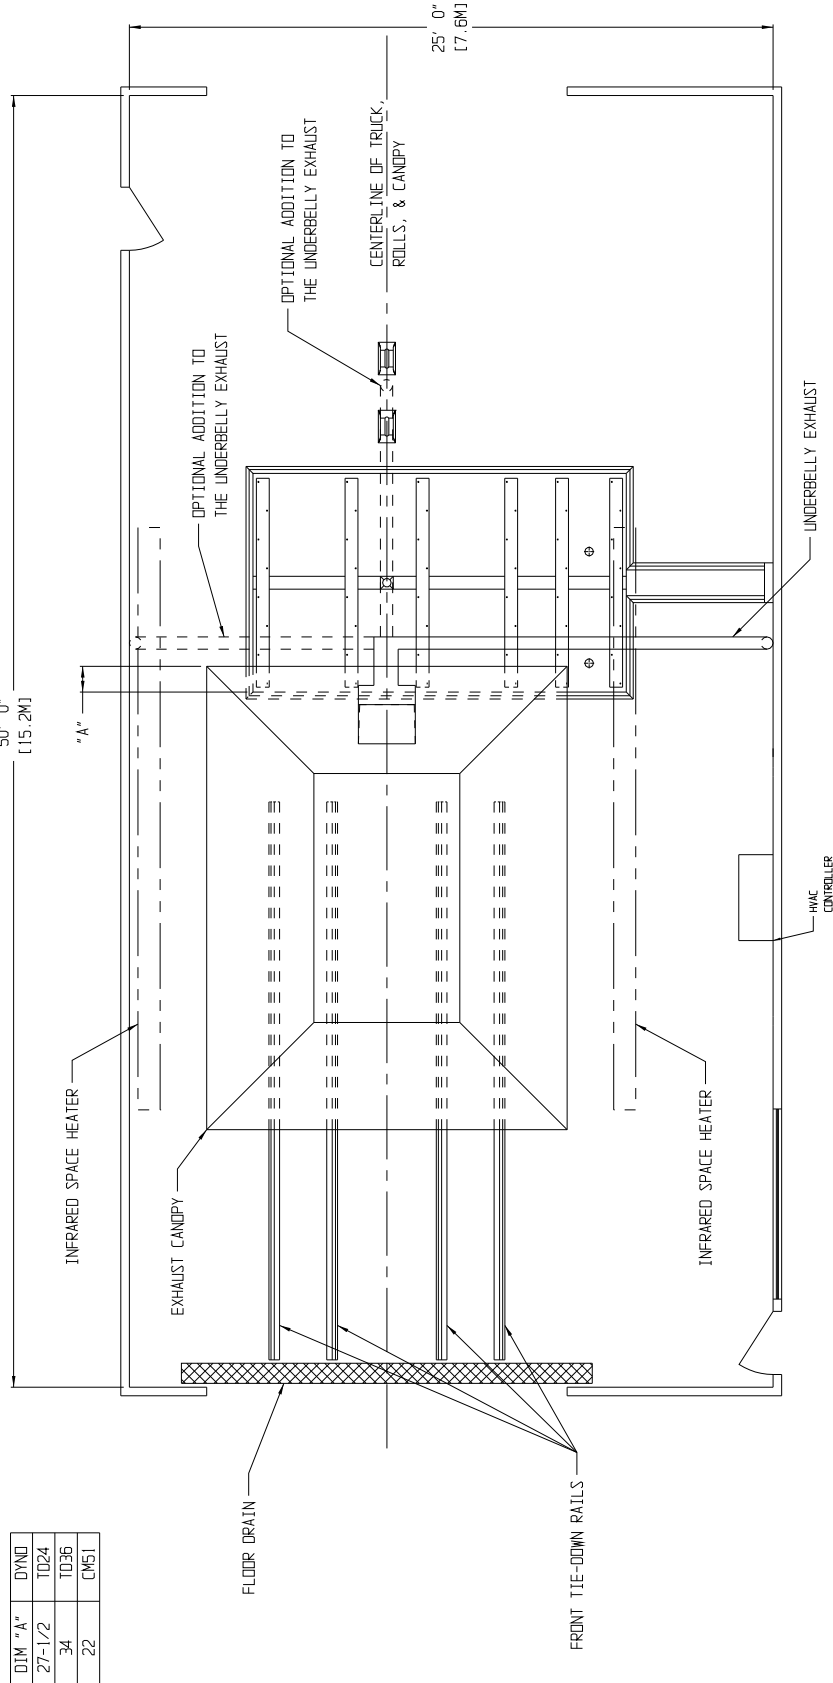

DIM "A"	DYNO
27-1/2	TD24
34	TD36
22	CM51

Weight Capacity: 30,000 lb (13,608 kg) per axle
Roll Brakes: Pneumatically actuated disc
Shipping Weight: 22,000 lb (9979kg)
Capacity: 1,650 hp (1,230kw) @ 45 mph (72 Km/h)
Rolls: 36" (915 mm) by 31" (787 mm) long,
Pit Required Depth: 35" (889 mm)

Note For Above View:

- (a) Refer to appropriate Taylor Foundation ("Pit") drawing - above are not working dimensions and are for use as layout guidance only. AC power, air and water required at one side wall.
- (b) Room length, and pit location within length, must be determined by user to fit his maximum truck length and rear overhang.
- (c) Provide at least one mandoor for fire escape near rear of room, but not in rear wall as someone entering during a test could be struck by a stone flung from a tire. Provide ample fire extinguishers at each door and near driver.
- (d) "Back-on Drive-off" preferred.

SMS807V001