




High Torque Pneumatic Engine Starter Kit

Kit

Starter

Outline & Interface Dimensions for High Torque Pneumatic Engine Starter Kit

Shut-off valve, relay valve, muffler, lubricator & pushbutton control valve are furnished but not shown. User must supply all pipe, hose, & a 100 gal. [397 L] min. air tank with 1-1/2" NPT outlet, at 125 psig [8.6 bar] min., 150 psig [10.3 bar] max.

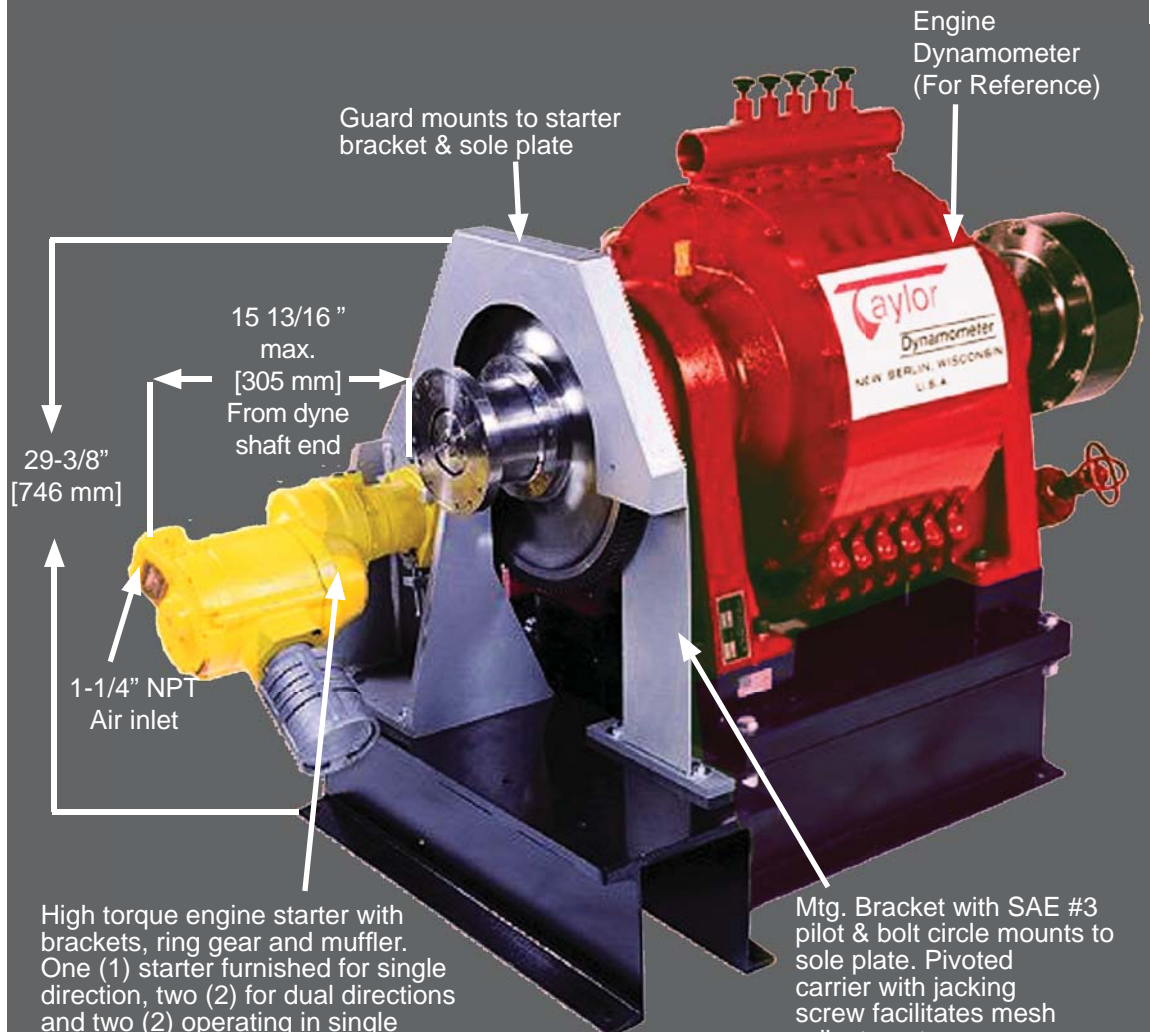

High torque engine starter with brackets, ring gear and muffler. One (1) starter furnished for single direction, two (2) for dual directions and two (2) operating in single direction of rotation for most DL Series applications.

Single Starter Application: Starting IC engine (4-stroke & 2-stroke diesel thru 3000 IN³ [49L]), thru engine dynamometer at 60°F [16° C] and above.

SMS832V005