




DX38 / Engine Dynamometer

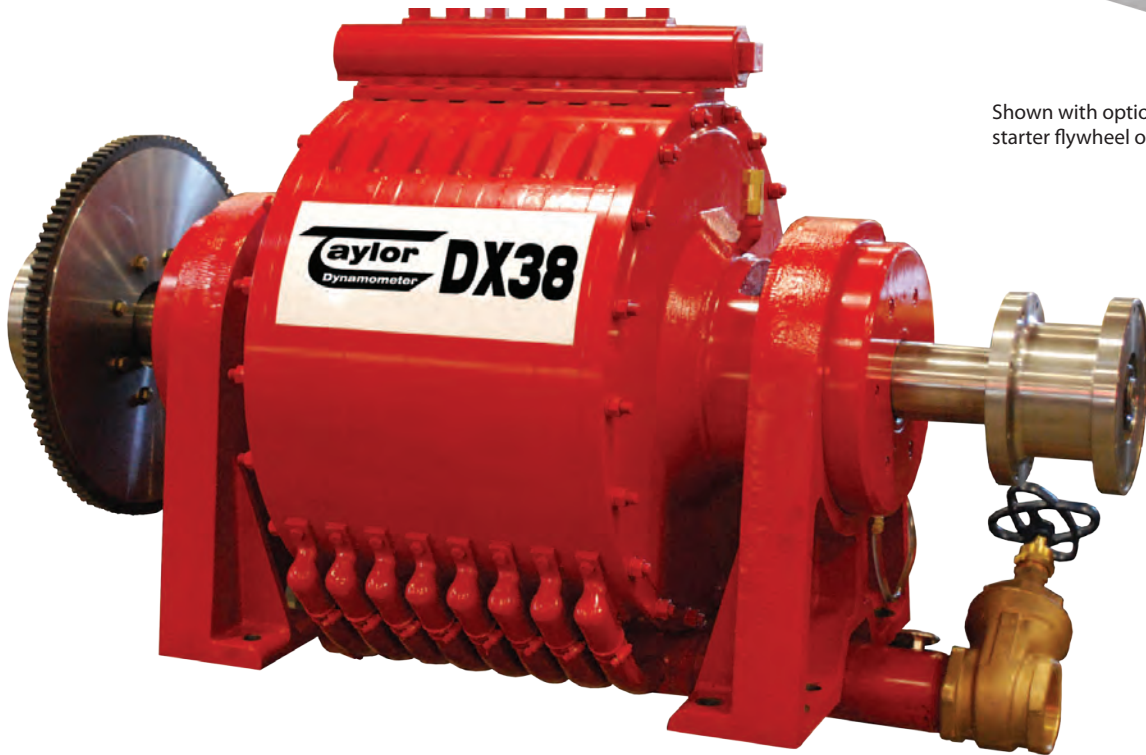

Shown with optional flanges and starter flywheel on shaft-ends.

DX38 Water Brake Dynamometer

Specifications

Power: 2,000 hp (1,491 kW)

Torque: 6,434 ft-lb (8,723 N)

Speed: 4,000 rpm

Water Use: 145 gpm (9.1 lps) (No Cooling System)

Inertia Value with Companion Flange or Torsional Coupling: 160.7 ft² · lb

Shipping Weight: 2,634 lb (1,195 kg)


Rotation: Dynamometer can be operated in both directions of rotation

Recommended Accessories

- Driveshaft - 1810
- Torsional Coupling - 1810
- Adapter Plate Kit
- Shaft Guard
- Sub-Base Kit
- Engine Cart - 12,000 lb. (5,448 kg)
- Air Starter - High Torque, Single or Dual Directional
- Cooling Column - 4,250 hp (3,169 kW)
- Charge Air Cooler
- Water Recirculating System

Total Test Success

Optional Accessories

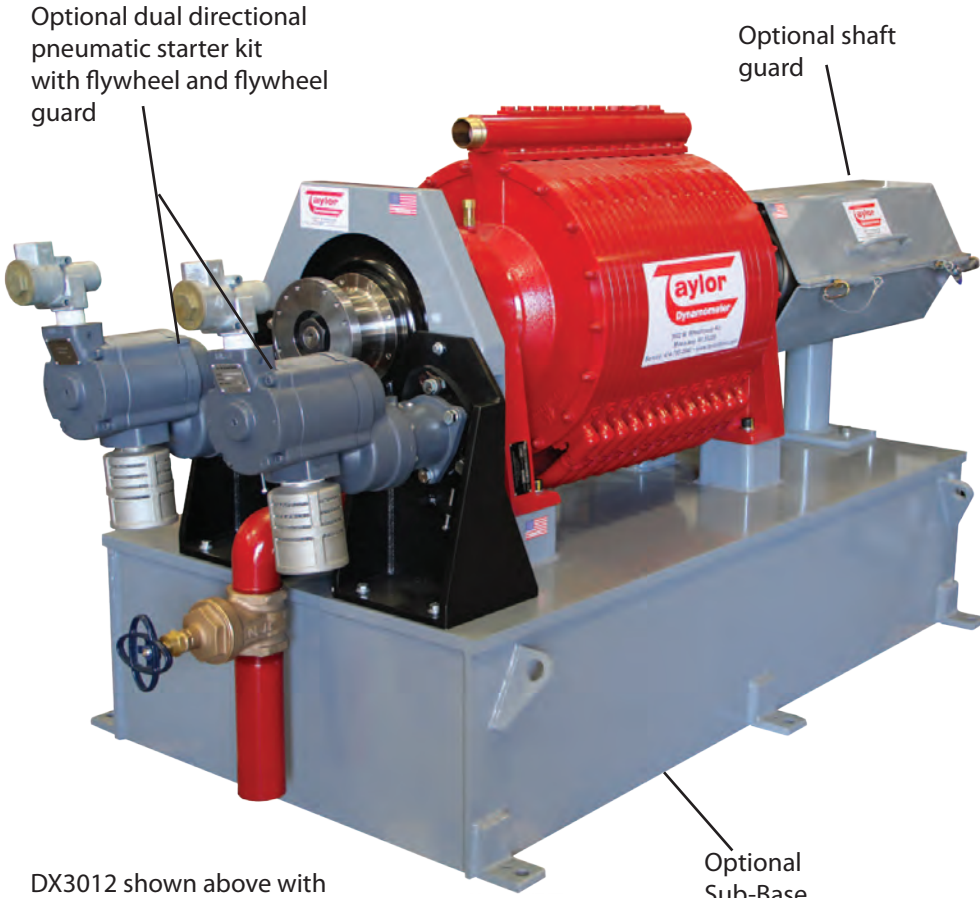

DX3012 shown above with available options

Optional Cooling Column



Optional Torsional Coupling




Optional Engine Cart (Engine not Included)




Optional Charge Air Cooler




DX38 (English)

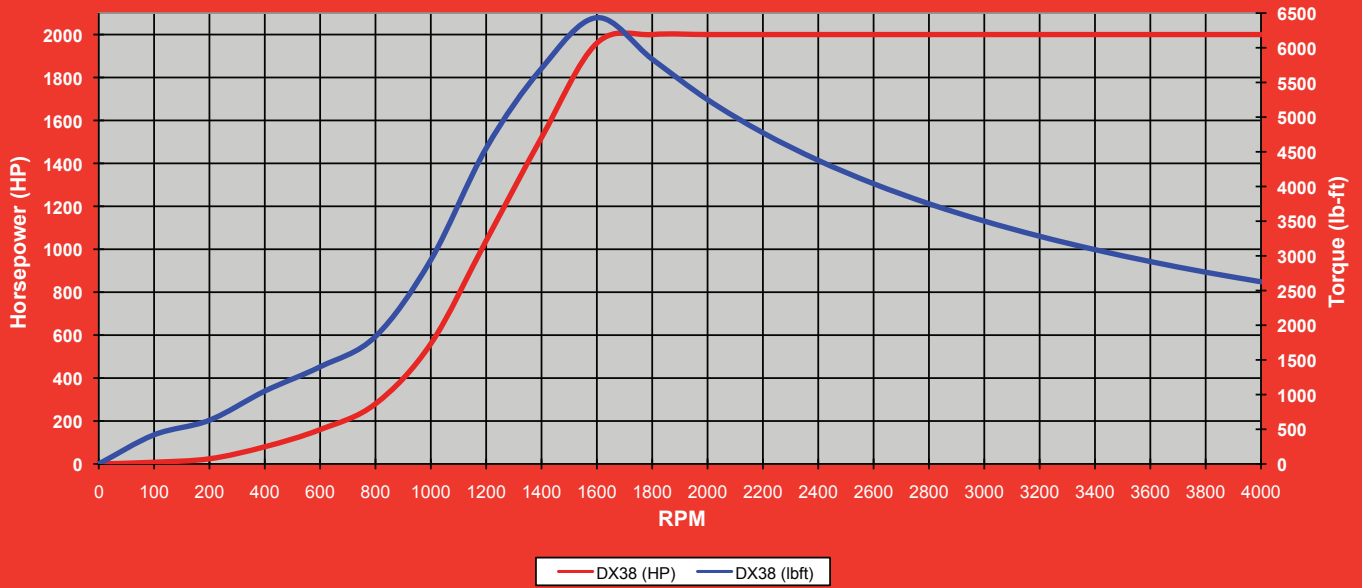

DX38 (Metric)

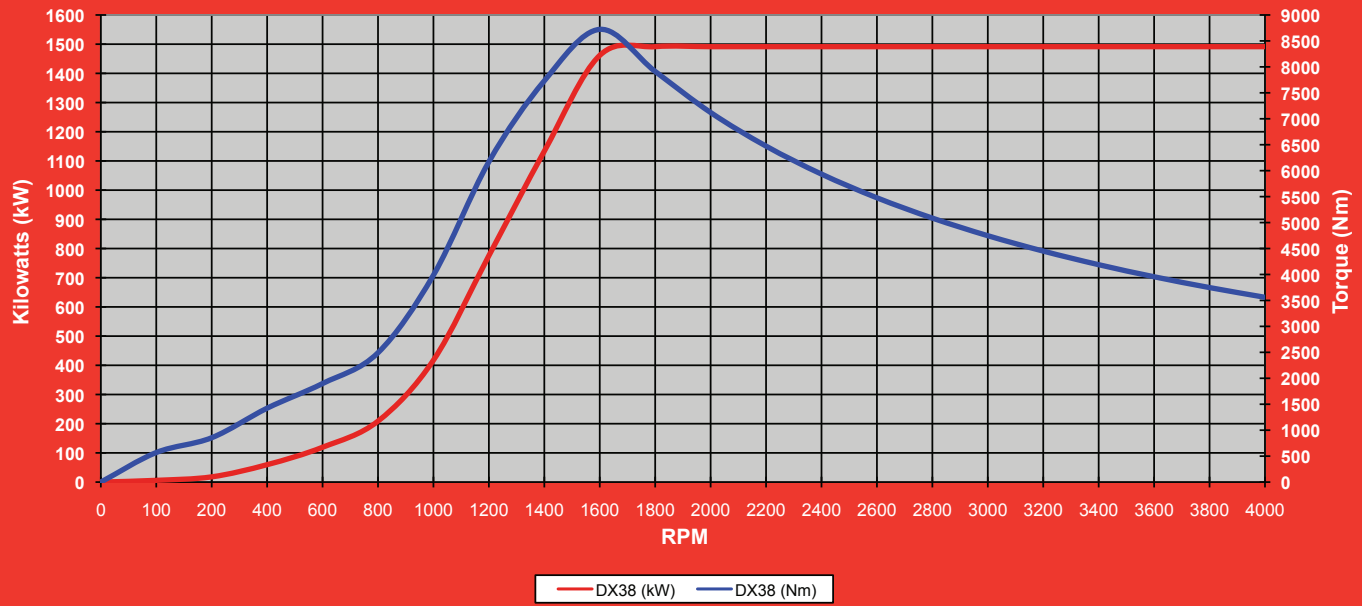

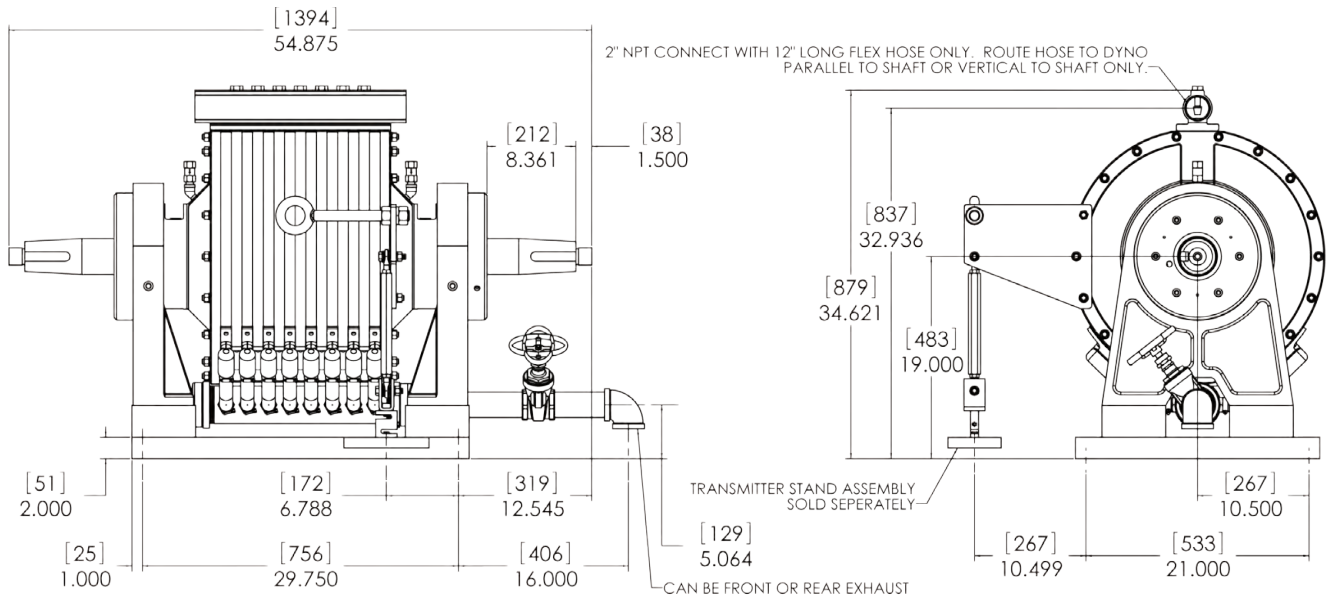

Specifications

Power: 2,000 hp (1,491 kW)

Torque: 6,434 ft-lb (8,723 N)

Speed: 4,000 rpm

Water Use: 145 gpm (9.1 lps) (No Cooling System)

Inertia Value with Companion Flange or Torsional Coupling: 160.7 ft² · lb

Shipping Weight: 2,634 lb (1,195 kg)

Rotation: Dynamometer can be operated in both directions of rotation

Everything you need to succeed



3602 West Wheelhouse Road, Milwaukee, Wisconsin 53208 U.S.A.
(414) 755-0040 www.taylordyno.com

SMS2016v004