




DX3010/ Engine Dynamometer

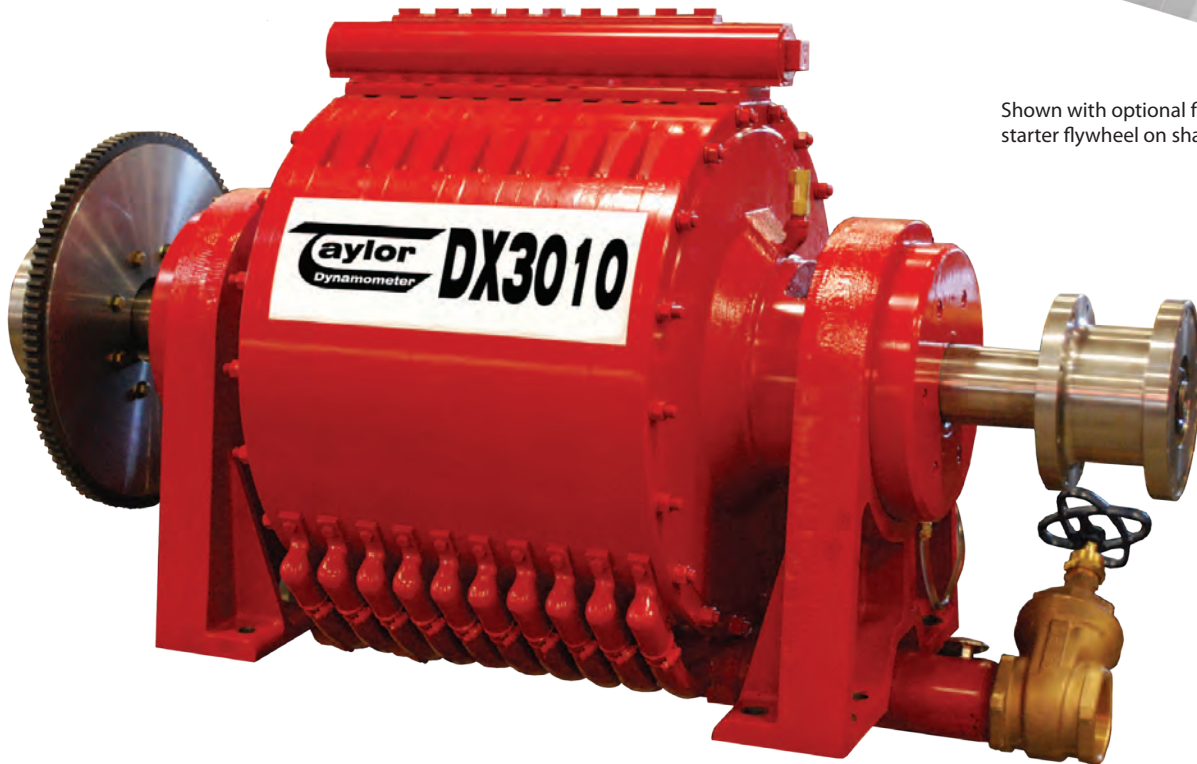

Shown with optional flanges and starter flywheel on shaft-ends.

DX3010 Water Brake Dynamometer

Specifications

Power: 2,500 hp (1,864 kW)

Torque: 8,042 ft-lb (10,904 N)

Speed: 4,000 rpm

Water Use: 182 gpm (11.5 lps) (No Cooling System)

Inertia Value with Companion Flange or Torsional Coupling: 199.9 ft² · lb

Shipping Weight: 3,082 lb (1,373 kg)


Rotation: Dynamometer can be operated in both directions of rotation

Recommended Accessories

- Driveshaft - 1880
- Torsional Coupling - 1880
- Adapter Plate Kit
- Shaft Guard
- Sub-Base Kit
- Engine Cart - 18,000 lb. (8,165 kg)
- Air Starter - High Torque, Single or Dual Directional
- Cooling Column - 4,250 hp (3,169 kW)
- Charge Air Cooler
- Water Recirculating System

Total Test Success

Optional Accessories

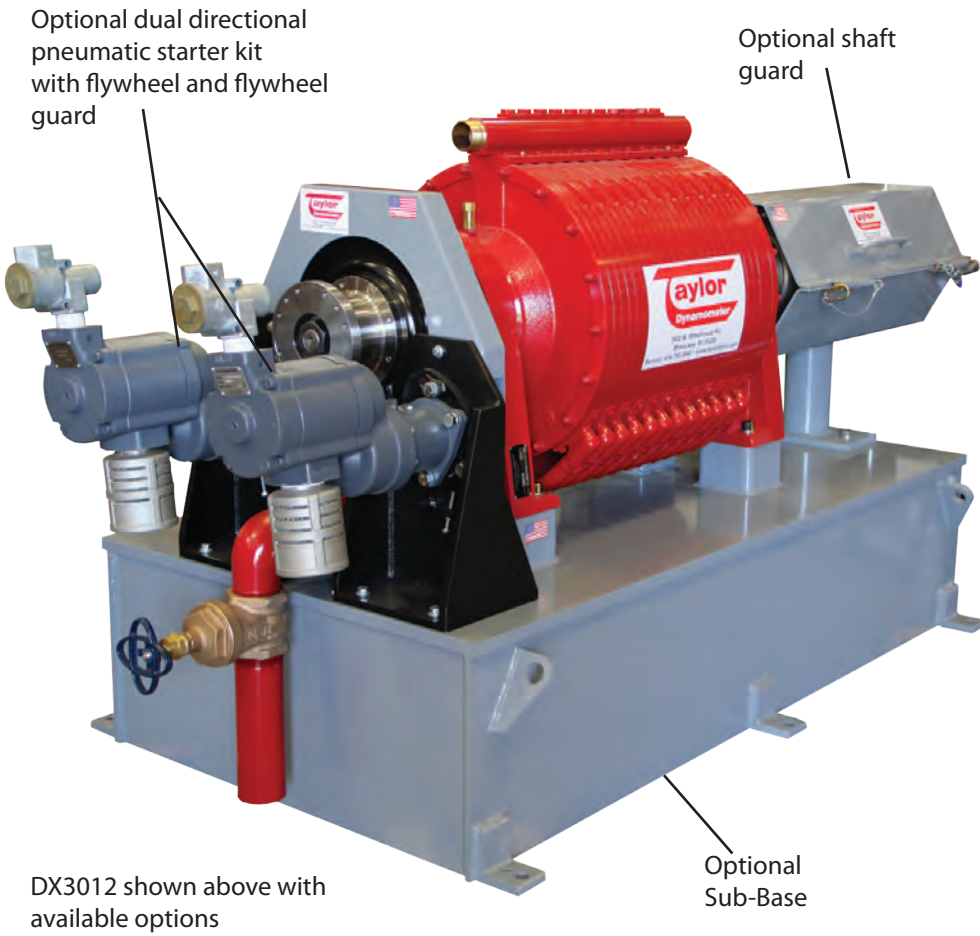

Optional Cooling Column



Optional Torsional Coupling






Optional Engine Cart (Engine not Included)



Optional Charge Air Cooler



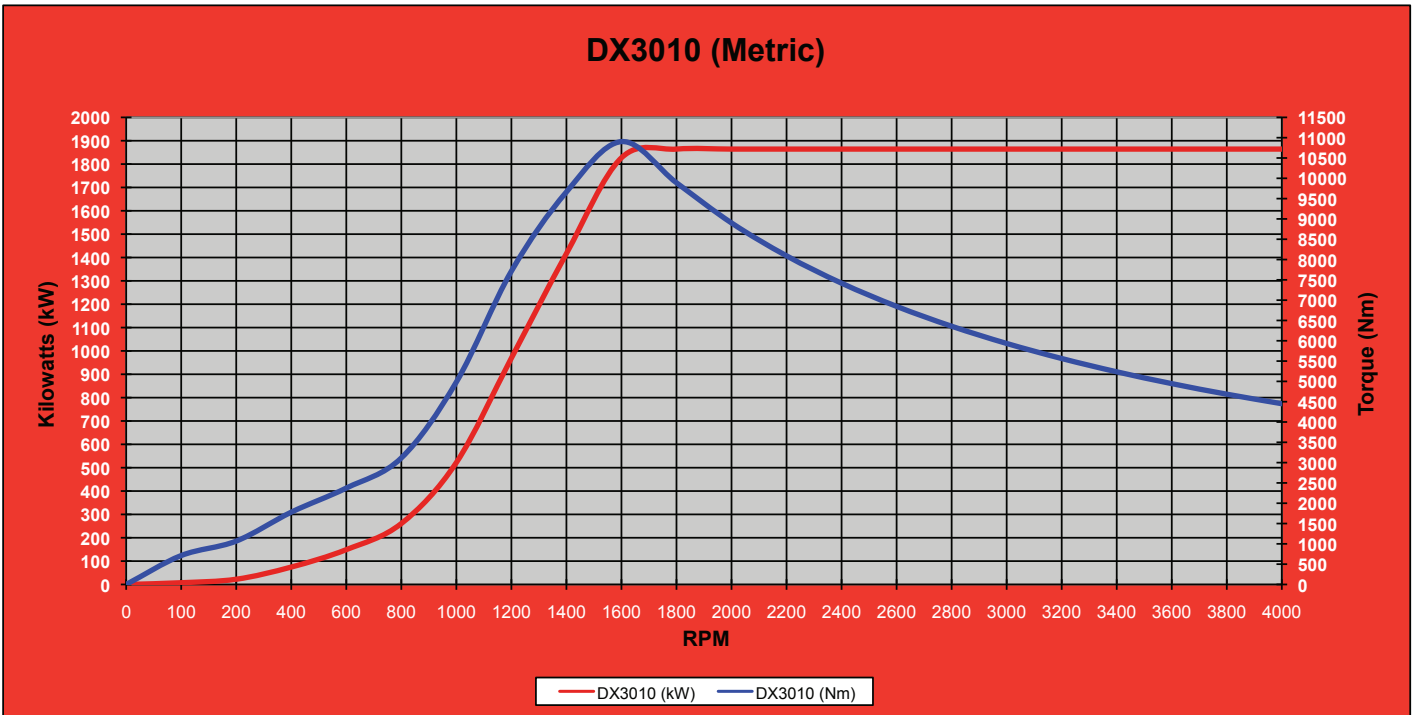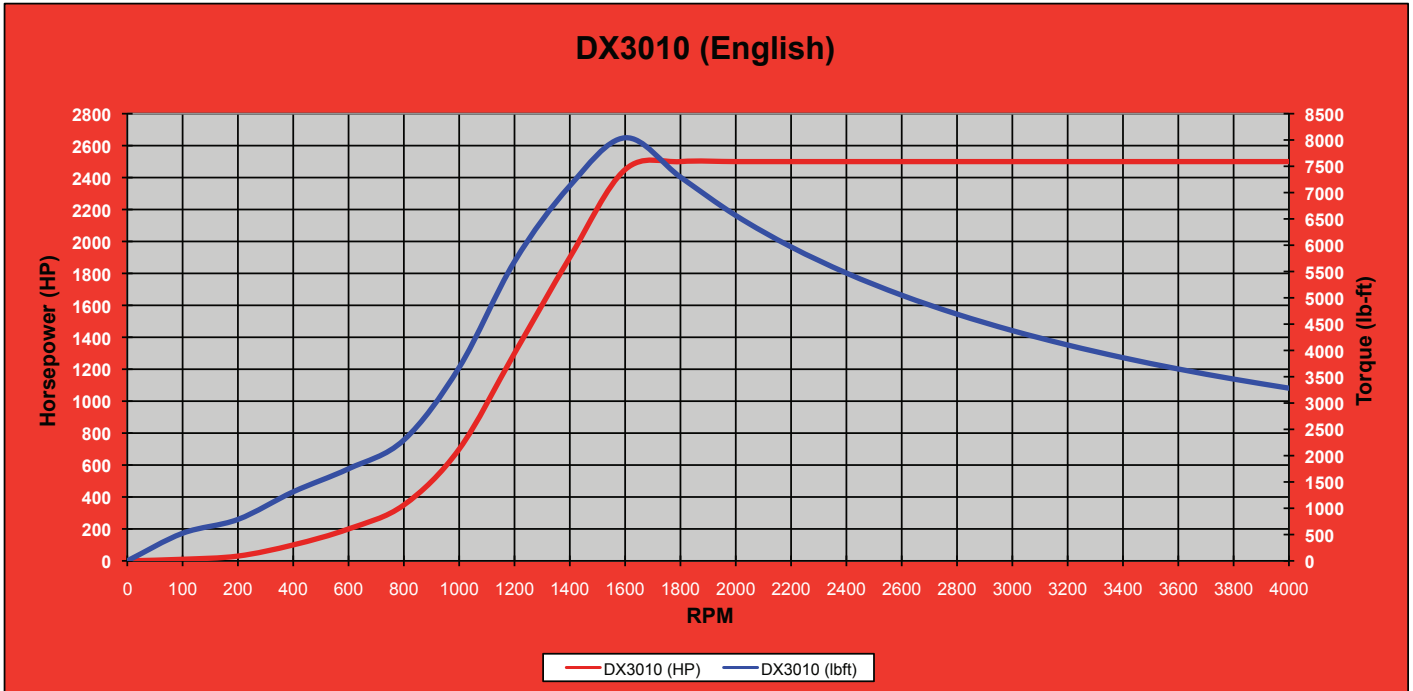

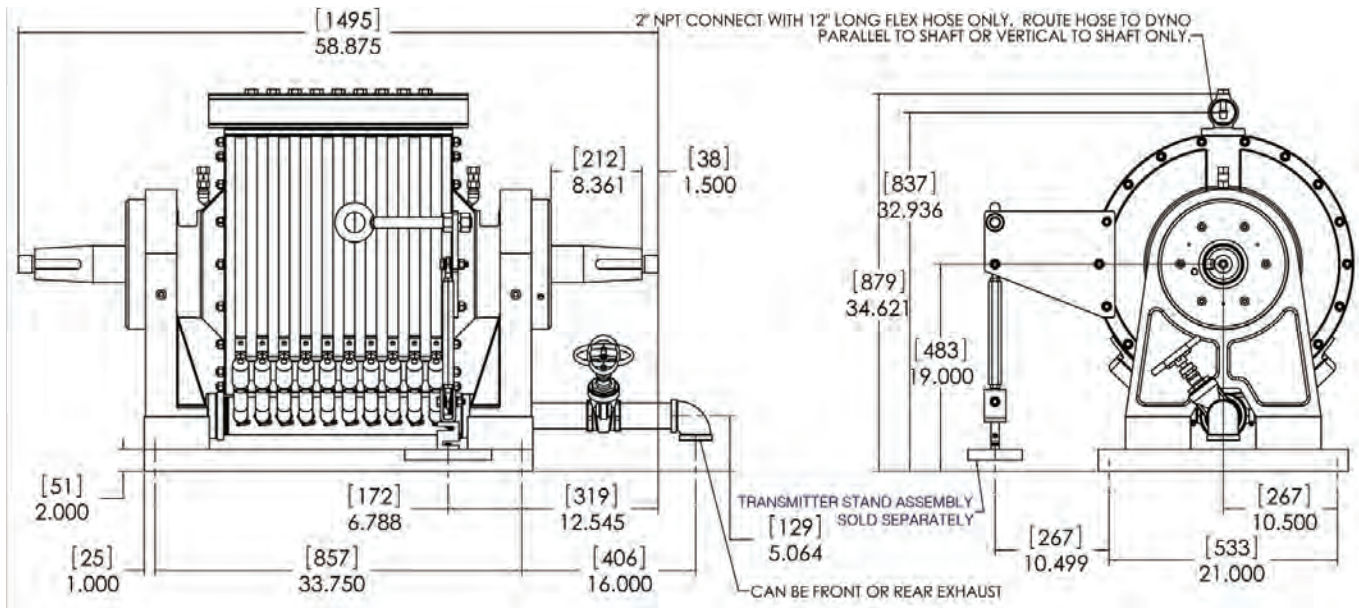

Specifications

Power: 2,500 hp (1,864 kW)

Torque: 8,042 ft-lb (10,904 N)

Speed: 4,000 rpm

Water Use: 182 gpm (11.5 lps) (No Cooling System)

Inertia Value with Companion Flange or Torsional Coupling: 199.9 ft² · lb

Shipping Weight: 3,082 lb (1,373 kg)

Rotation: Dynamometer can be operated in both directions of rotation

Everything you need to succeed



3602 West Wheelhouse Road, Milwaukee, Wisconsin 53208 U.S.A.
 (414) 755-0040 www.taylordyno.com

SMS2017v004