




DL8K / Engine Dynamometer

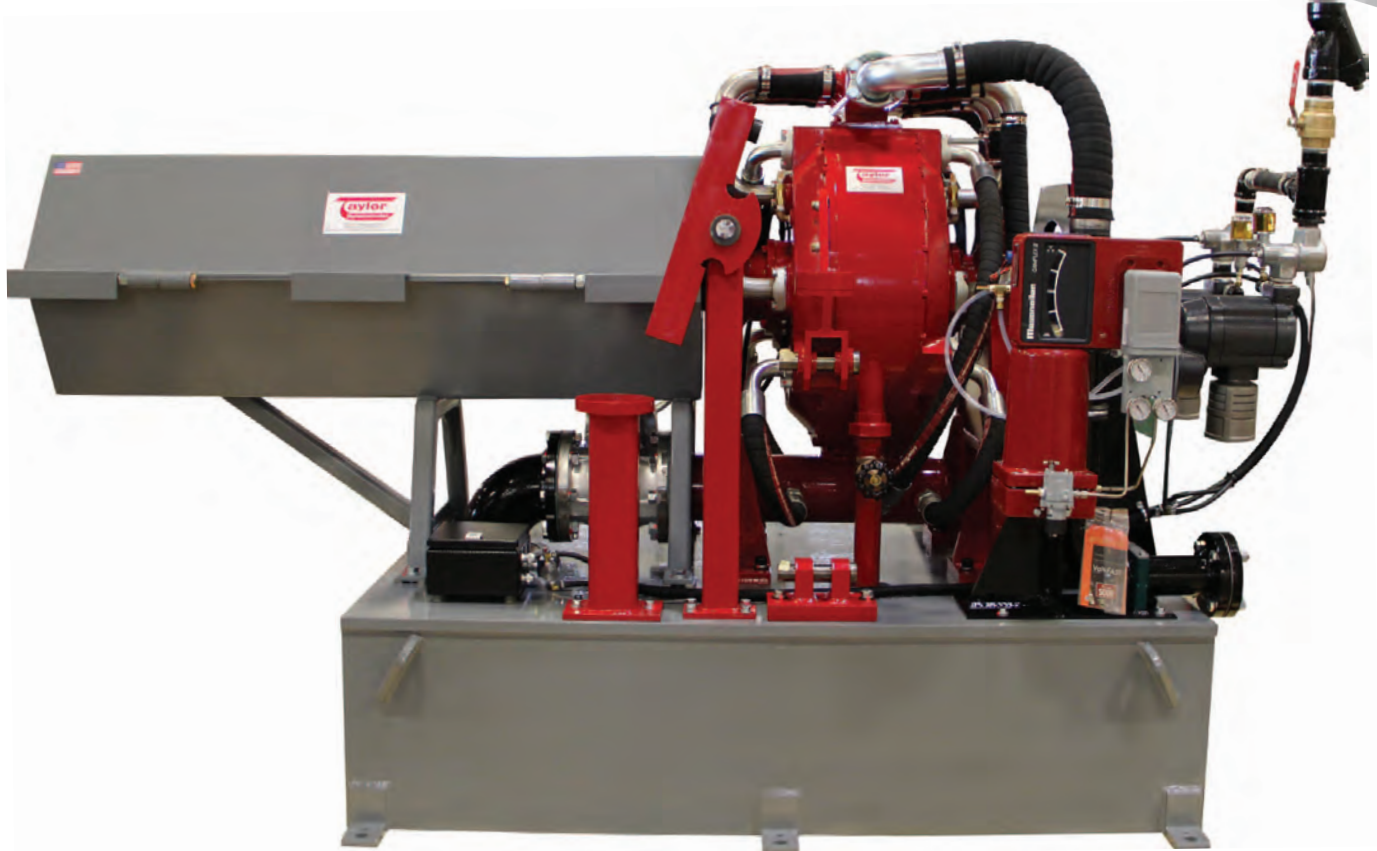

DL8K Water Brake Dynamometer

Specifications

Power: 8,000 hp (5,966 kW)

Torque: 60,195 ft-lb (81,614 N)

Speed: 2,550 rpm

Water Use: 582 gpm (36.7 lps) (No Cooling System)

Inertia Value with Companion Flange: 317.9 ft² · lb


Shipping Weight: 3,500 lb (1,587 kg)

Recommended Accessories

- Driveshaft
- Closed Loop Cooling Center
- Engine Cart
- Fuel Measurement Unit (FMU)
- Adapter Plate Kit
- Air Starter
- Driveshaft Guard
- Sub-Base Kit
- Throttle Control
- Water Recirculating System

Total Test Success

Optional Accessories

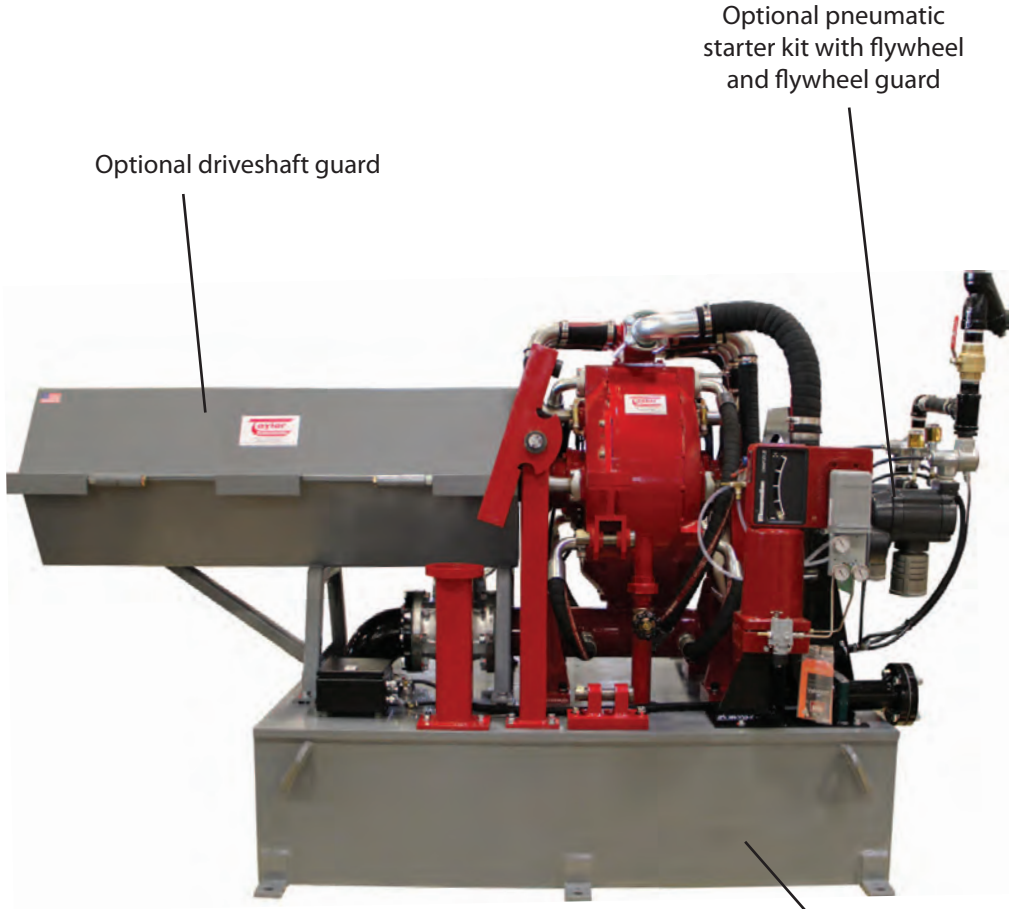

DL8K shown above with available options

Optional pneumatic starter kit with flywheel and flywheel guard

Optional driveshaft guard

Optional sub-base kit

Optional Closed Loop Cooling Center




Optional Engine Cart




Optional Fuel Measurement Unit






DL8K (English)

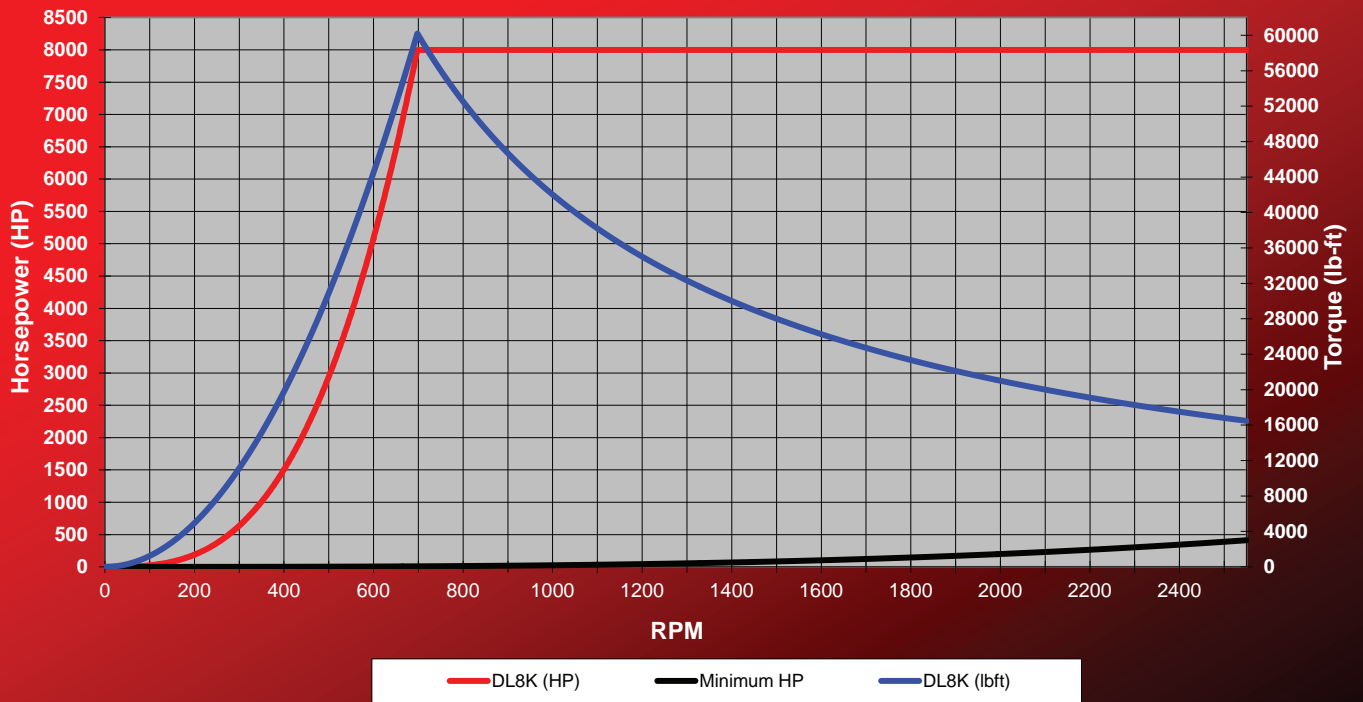

DL8K (Metric)

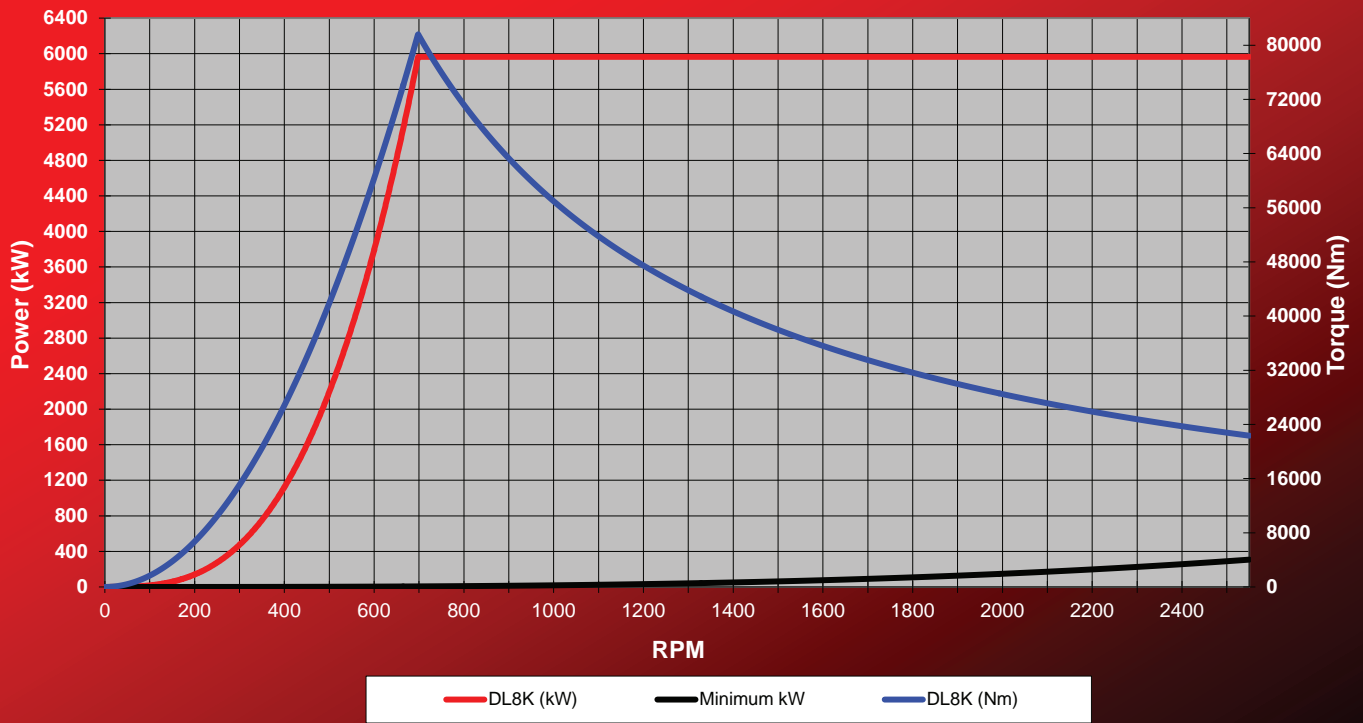

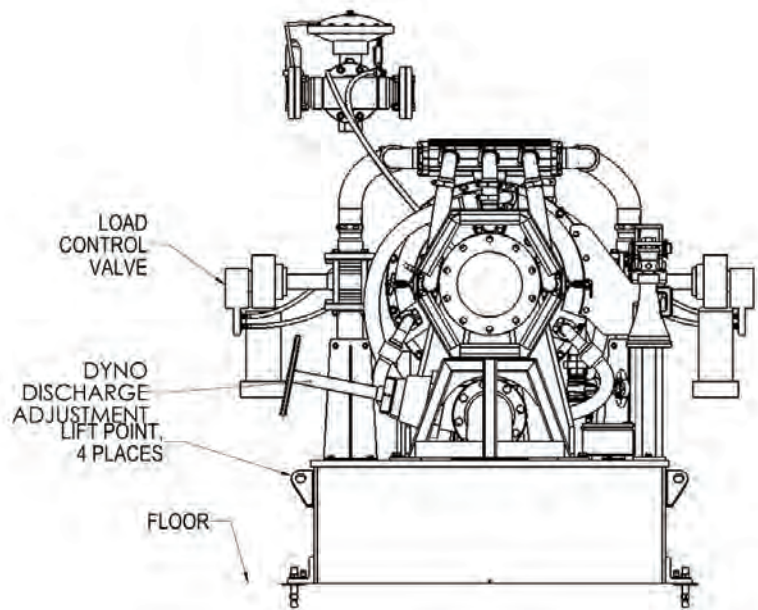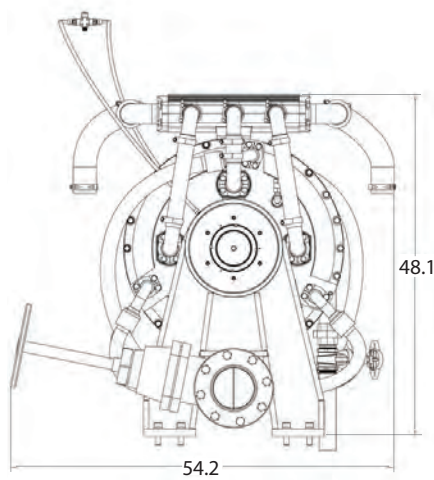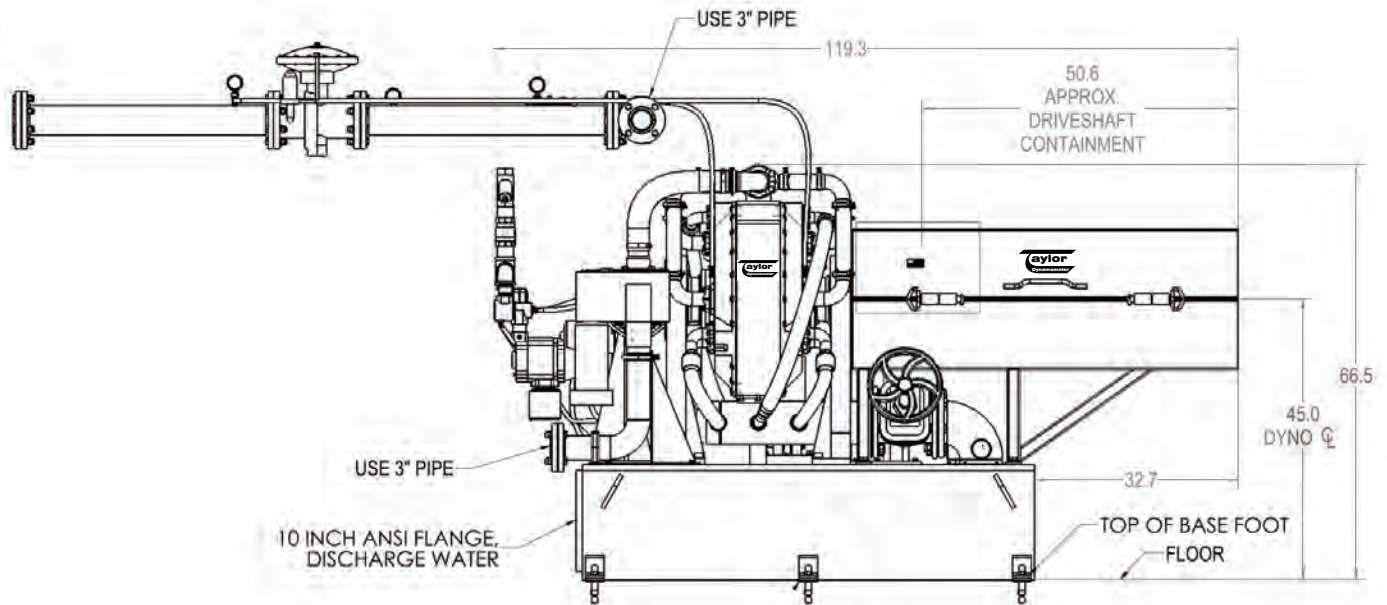

Specifications

Power: 8,000 hp (5,966 kW)

Torque: 60,195 ft-lb (81,614 N)

Speed: 2,550 rpm

Water Use: 582 gpm (36.7 lps) (No Cooling System)

Inertia Value with Companion Flange: 317.9 ft² · lb

Shipping Weight: 3,500 lb (1,587 kg)

Dimensions shown in inches.

Everything you need to succeed



3602 West Wheelhouse Road, Milwaukee, Wisconsin 53208 U.S.A.
 (414) 755-0040 www.taylordyno.com

SMS2040v004