




TD-3100 / Engine Dynamometer

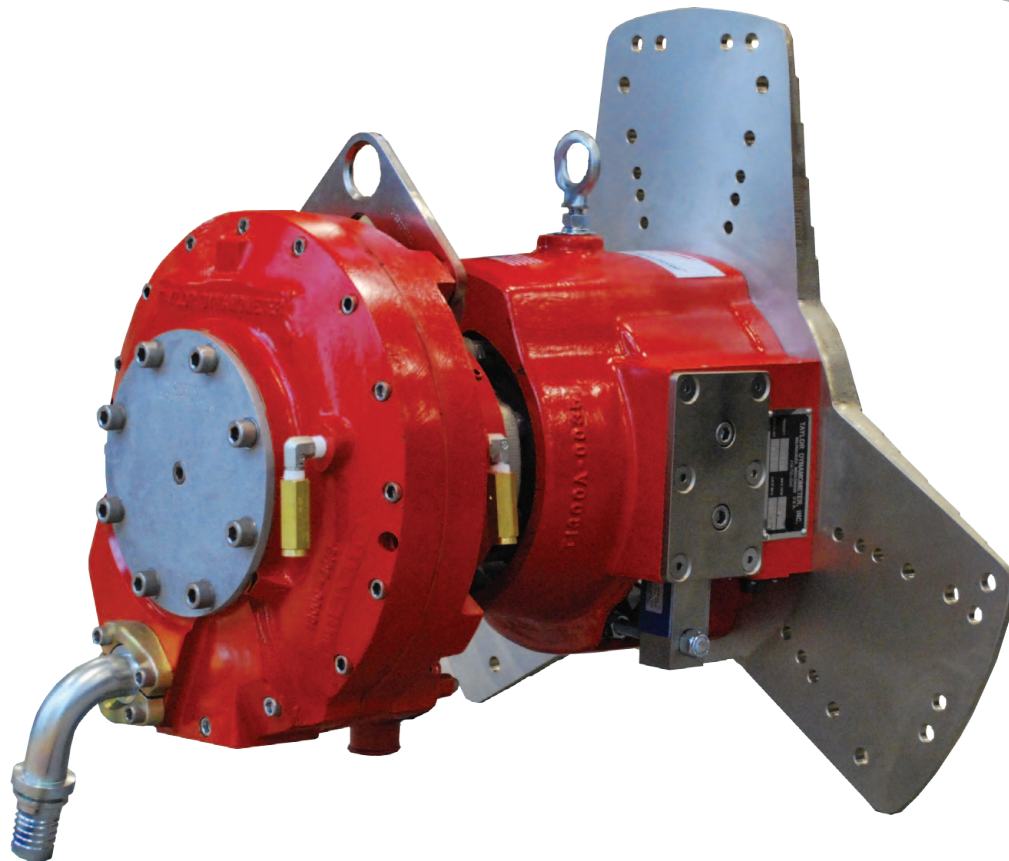

TD-3100 Portable Engine Dynamometer

Specifications

Power: 1,250 hp (932 kW)

Torque: 3,600 ft-lb (4,881 Nm)

Speed: 4,000 rpm

Water Use: 100 gpm @ 60 psi (6.3 lps @ 420 kpa) (No cooling system)

Minimum Controllable Power: 11 hp (5 kW)

Minimum Controllable Torque: 32 ft-lb (24 Nm)

Inertia Value: 570 lb/in²

Weight: 360 lb (163 kg)

Recommended Accessories

- Cooling Column – 1250 hp (932 kW)
- Adapter Plate Kit
- Charge Air Cooler
- Water Recirculating
- Throttle Control


Everything you need to succeed

TD-3100 (English)



TD-3100 (Metric)




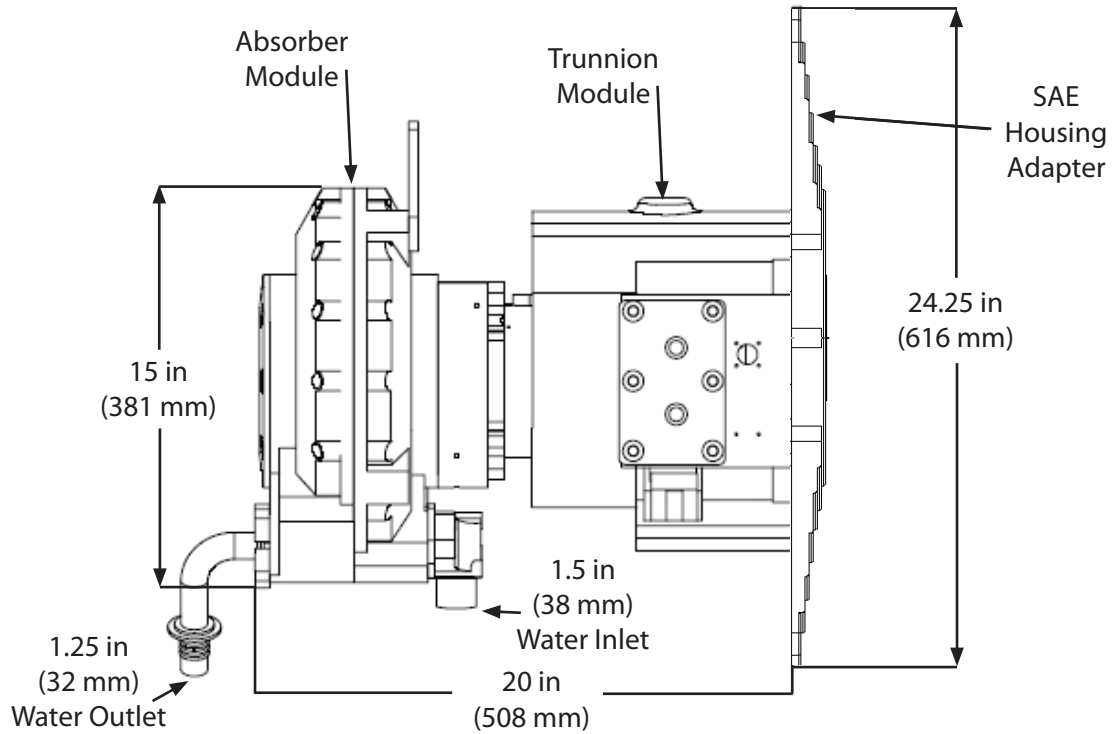

Note: Dimensions are approximate, not actual.

Specifications

Power: 1,250 hp (932 kW)
 Torque: 3,600 ft-lb (4,881 Nm)
 Speed: 4,000 rpm
 Water Use: 100 gpm @ 60 psi (6.3 lps @ 420 kpa)
 (No cooling system)
 Minimum Controllable Power: 11 hp (5 kW)
 Minimum Controllable Torque: 32 ft-lb (24 Nm)
 Inertia Value: 570 lb/in²
 Weight: 360 lb (163 kg)

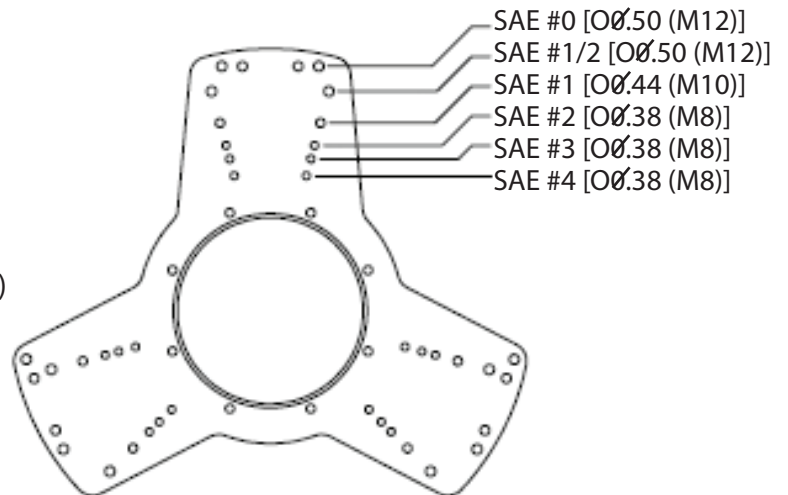

Everything you need to succeed



3602 West Wheelhouse Road, Milwaukee, Wisconsin 53208 U.S.A.
 (414) 755-0040 www.taylordyno.com

SMS2043v002