




1880 Driveshaft / Engine Dynamometer

Specifications

- Continuous load rating 5,000 lb-ft (6,779 Nm) with no angular misalignment and $2^\circ \pm 1^\circ$ slope (parallel offset between 0.5 and 1.5 in. (13 and 40 mm))
- Maximum Recommended Short Duration Load 8,900 lb-ft (12,000 Nm) with no angular misalignment and $2^\circ \pm 1^\circ$ slope (parallel offset between 0.5 and 1.5 in. (13 and 40 mm))
- Minimum Elastic Limit 16,000 lb-ft (21,690 Nm) represents the maximum torque load the universal joint will transmit instantaneously without brinelling bearings or yield in any part
- Maximum Allowable Speed 4,000 rpm
- Dynamically balanced
- Weight 150 lb (68 kg)

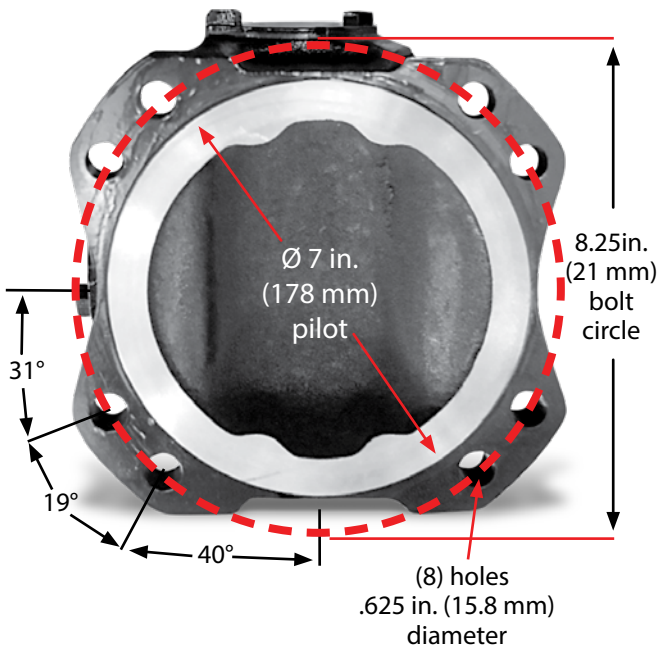

28.5 in. (24 mm)
minimum collapsed
30.94 in. (786 mm)
maximum extended



As a safety precaution, Taylor Dynamometer recommends a torsional analysis to uncover any potential torsional problems that exist for each application. This analysis will identify any torsional issues (frequencies) that should be fixed prior to operation. Excessive linear vibration may also create problems that must be mitigated for continued operation. It is the customer's responsibility to ensure that these vibration issues are addressed upon application. Equipment failures attributed to linear or torsional vibration are not warrantable.

Everything you need to succeed



3602 West Wheelhouse Road, Milwaukee, Wisconsin 53208 U.S.A.
(414) 755-0040 www.taylordyno.com

SMS2504v004