




35 hp (26 kW) Pneumatic Engine Starter Kit Engine Dynamometer

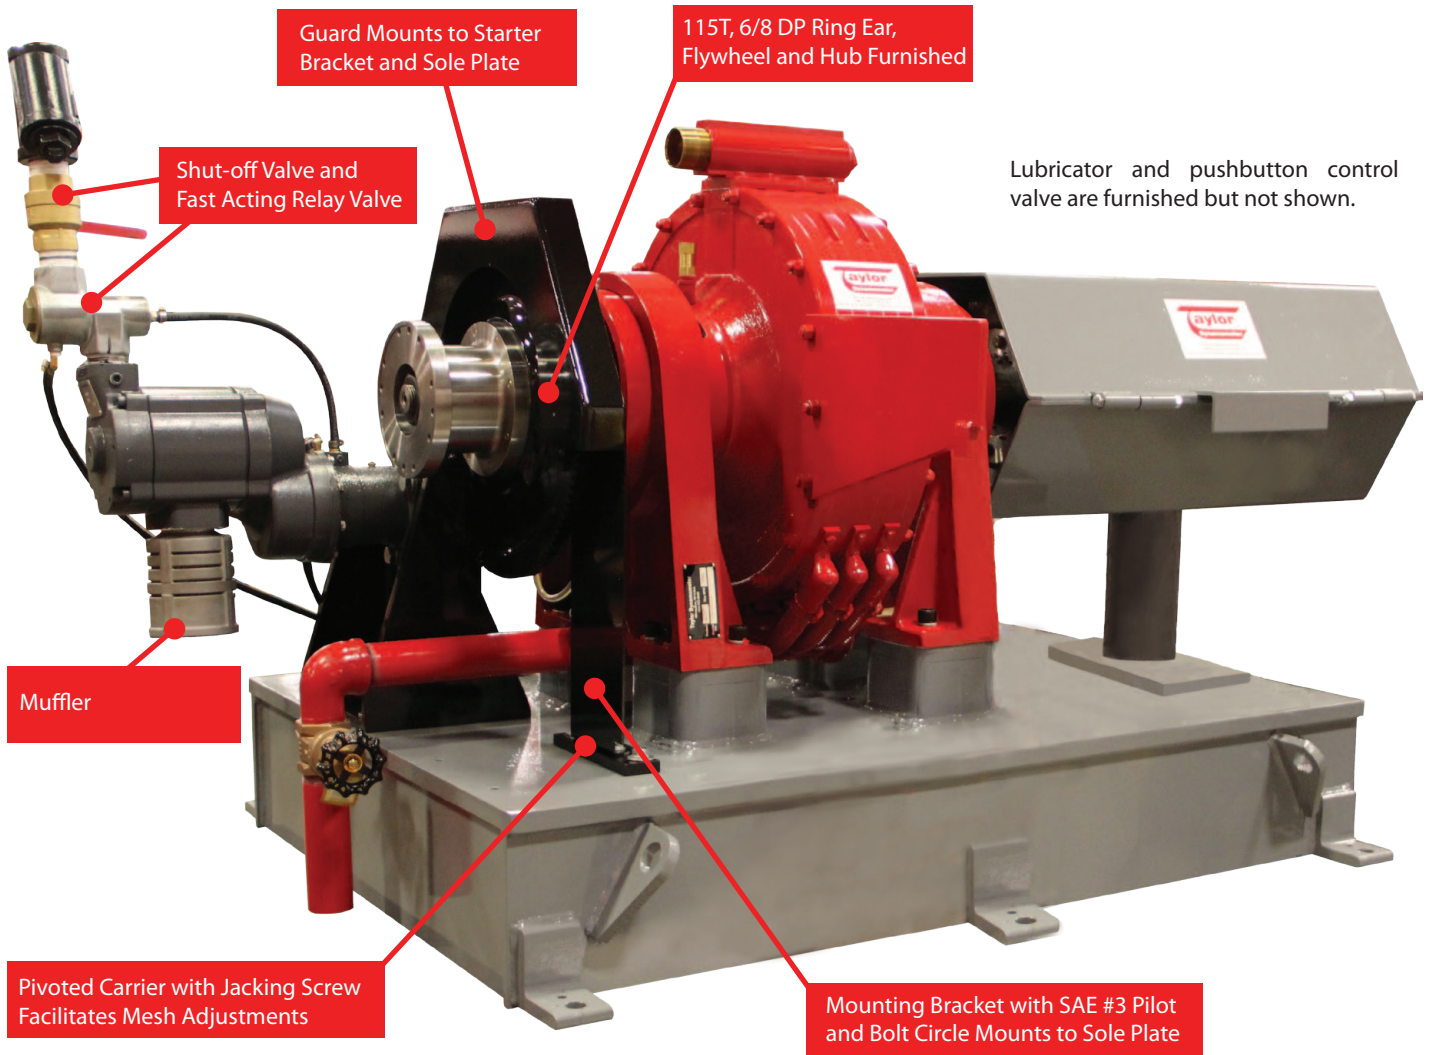

The 35 hp (26 kW) Pneumatic Engine Starter Kit includes brackets, ring gear and muffler. One (1) starter furnished for single direction, two (2) for dual directions and two (2) operating in single direction of rotation for most DL Series applications. Customer must supply all pipe, hose, and a 100 g (397 l) minimum air tank with 1-1/2" NPT outlet, at 125 psig (8.6 bar) minimum, 150 psig (10.3 bar) maximum.

Single Starter Application:

Starting IC engine (4-stroke and 2-stroke diesel through 3,000 in³ (49 l)), through engine dynamometer at 60°F (16° C) and above.

Everything you need to succeed

