



RS-60K / Towing Dynamometer



RS-60K Towing Dynamometer

Taylor Dynamometer's RS-60K towing dynamometer is designed for testing Class B trucks and is the most full-featured, reliable and accurate towing dynamometer in the industry. The RS-60K is built with a heavy-duty steel frame, heavy-duty industrial axles and rides on an air ride suspension. The RS-60K is designed to maintain 60,000 Newtons of constant drawbar pull and the ability to simulate an uphill slope of 25%. The towing dynamometer uses absorbers with special high temperature coils powered by an industrial generator so there are no lead-acid batteries to charge and testing is unlimited at low speeds.

DynPro₂

Taylor Dynamometer's DynPro₂ state-of-the-art data acquisition and control system makes testing simple, but also fully controls the dynamometer wirelessly. The DynPro₂ system offers hill simulation that goes far beyond typical load testing by allowing the engineer to create and store automated hill simulations.



Includes a wireless, touchscreen tablet

Additional Features of DynPro₂:

- Graphical representation of an automated test cycle with driver identification (Driver's Trace)
- Real-time measurements including speed, acceleration, distance and direction
- Simulate real-life driving conditions from mapped or official data specifications using reference tables
- Calculate acceleration, accumulated count, towing load equation and track road load in real time using statistic channels
- Automatically run a program, open a document, set channel values or even start a test all upon startup

Hill Simulation Features

- Simulate slope
- Compensate for actual slope
- Simulate trailer weight and aero
- Compensate for vehicle weight
- Reference slope input
- Import/export Excel® file
- Save, name and file hill profile
- Auto record data
- Integrated heads up/drivers trace display

Everything you need to succeed



RSL-60K Specifications

- Ruggedized, WiFi, touch screen tablet PC controller with integrated heads-up display
- DynPro₂ Software
- Wireless or CAT5 communication
- Heavy-duty frame construction
- Heavy-duty, industrial diesel generator (with remote start)
- NEMA enclosure for electronics
- Absorbers with high temperature coils
- Air ride suspension with onboard air compressor
- Largest drawbar shaft in the industry
- Surge brakes and ABS
- Tire size: 22.5 or 24.5 dually or super singles available
- Max drawbar pull: 60,000 Newtons (13,488 lb)
- Weight Dry: 8,618 kg (19,000 lb)
- Length: 823 cm (324 in.)
- Width: 243.8 cm (96 in.)
- Height: 165.1 cm (65 in.)

Options

- Calibration stand
- Storage cabinet
- Ballast tank
- LED amber warning beacon
- CE Certification


Notes:

Specifications are subject to change without notice to improve the product without sacrificing quality or performance.


Taylor's RS and RSL series towing dynamometers are intended to be used on a test track. While Taylor stands behind the road worthiness of the trailers, the specialized control features and handling interactions between the towing dynamometer and test vehicle result in our recommendation to use them within controlled test facilities. Obtaining regulatory approvals for road licensing is the responsibility of the end user.

The data acquisition and control system offered here includes a software license that allows the system to operate and collect data. Please be aware that the license initially installed is a temporary license that is only active for 120 days from the date of shipment from Taylor Dynamometer. You must contact the Taylor Dynamometer Customer Support Team before the 120-day license expires to obtain the license key to update to your permanent (regular) license. The system will shut down and become non-operational should the system registration key (license) expire. The purchased equipment must be paid for in full prior to obtaining the valid and permanent license key.


RS-60K Power Absorption
11.00 24.5 Tires, and 5.13 :1 Drive Ratio

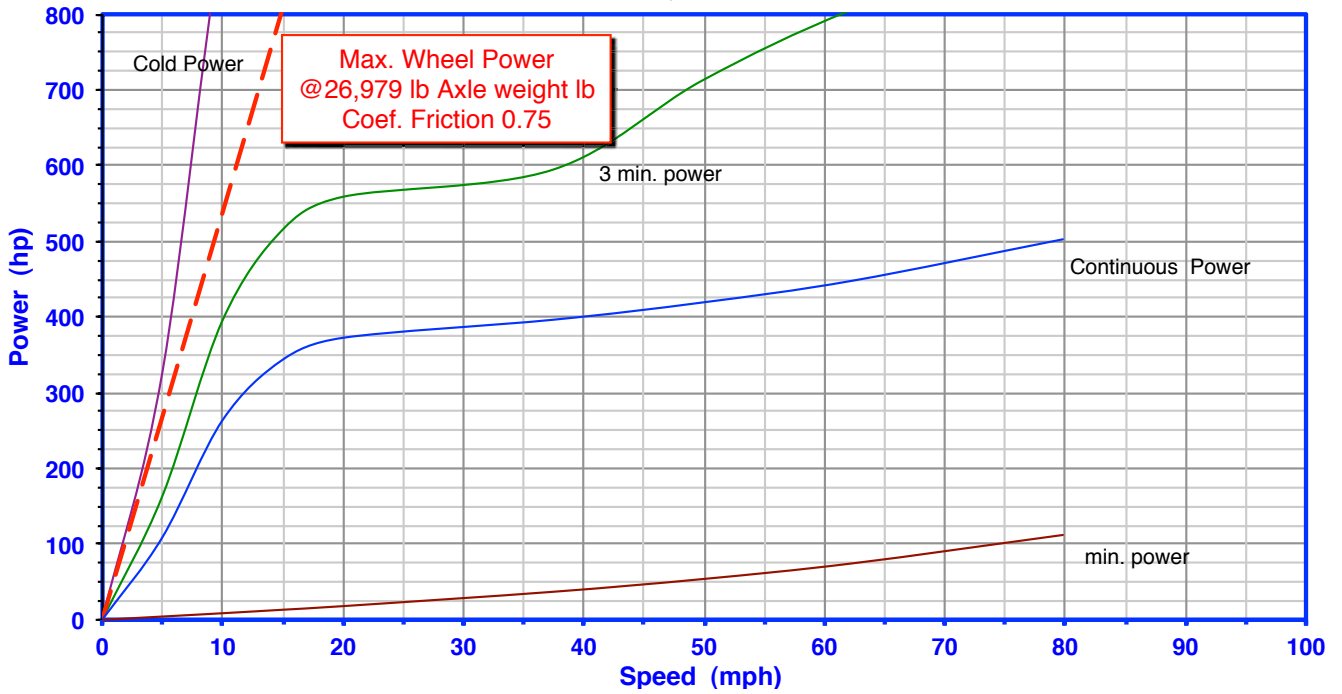


RS-60K Drawbar Pull
11.00 24.5 Tires, and 5.13 :1 Drive Ratio

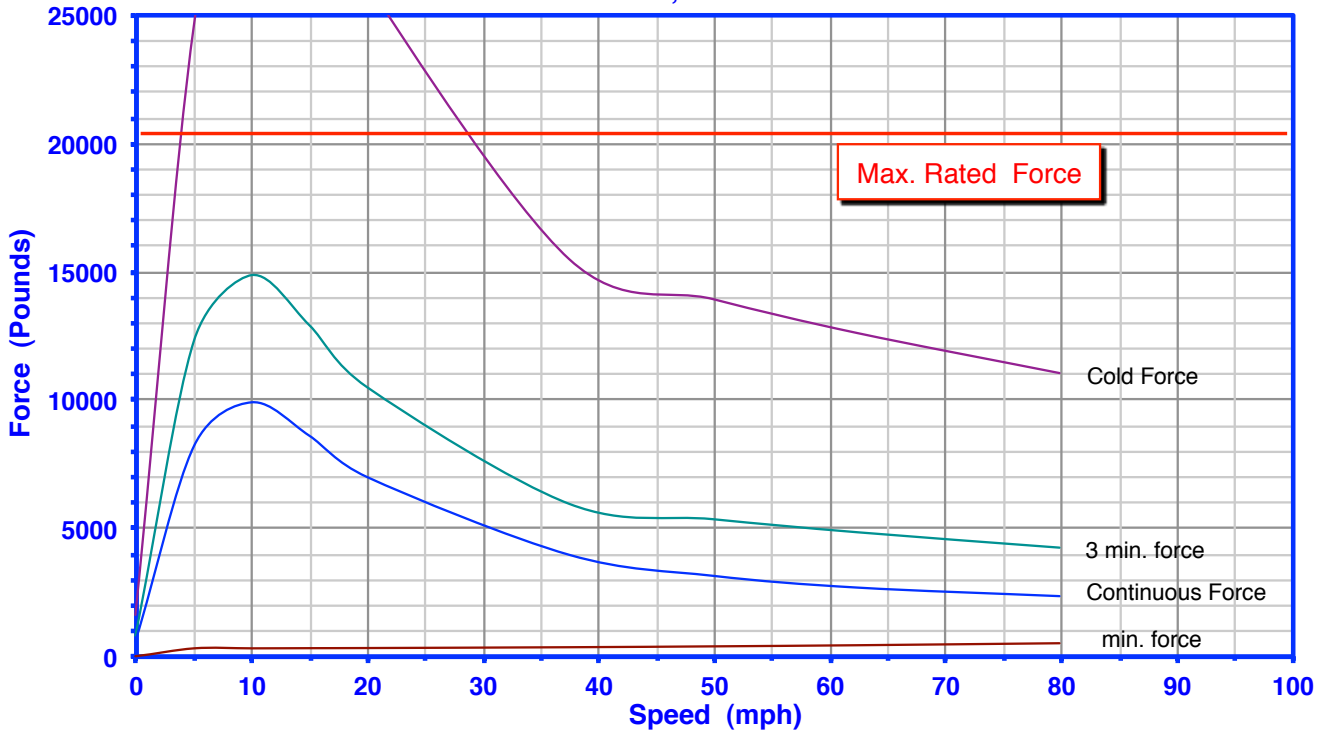


RS-60K Power Absorption
11.00 24.5 Tires and 5.13:1 Drive Ratio

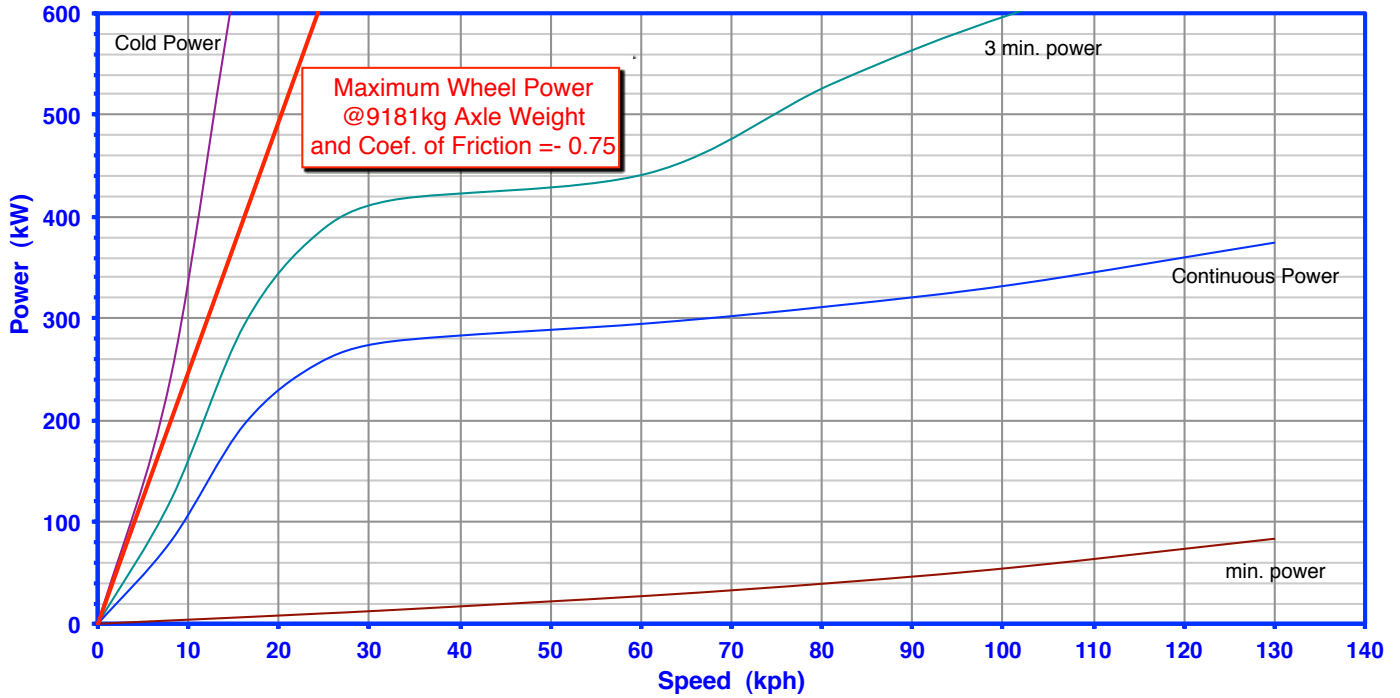


RS-60K Drawbar Force
11.00 24.5 Tires and 5.13:1 Drive Ratio

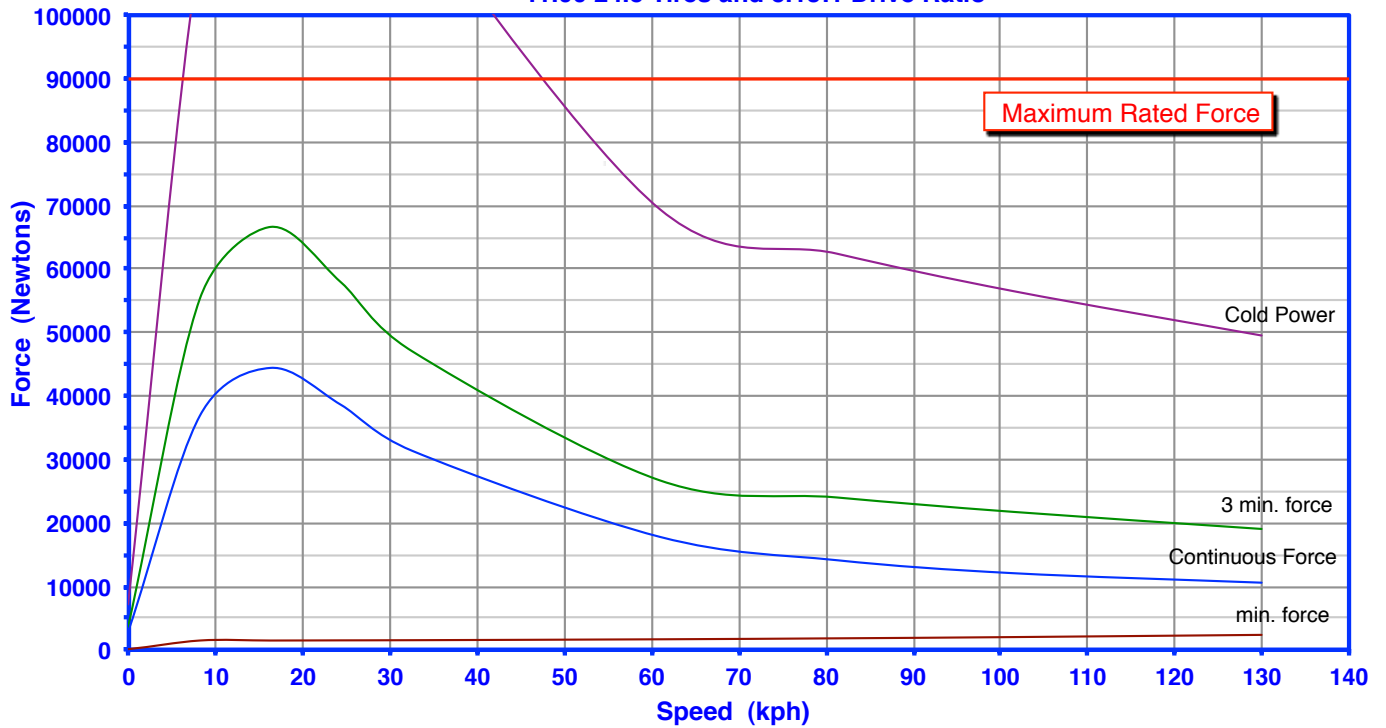


RS-60K Power Absorption
11.00 24.5 Tires, and 11.44:1 Drive Ratio

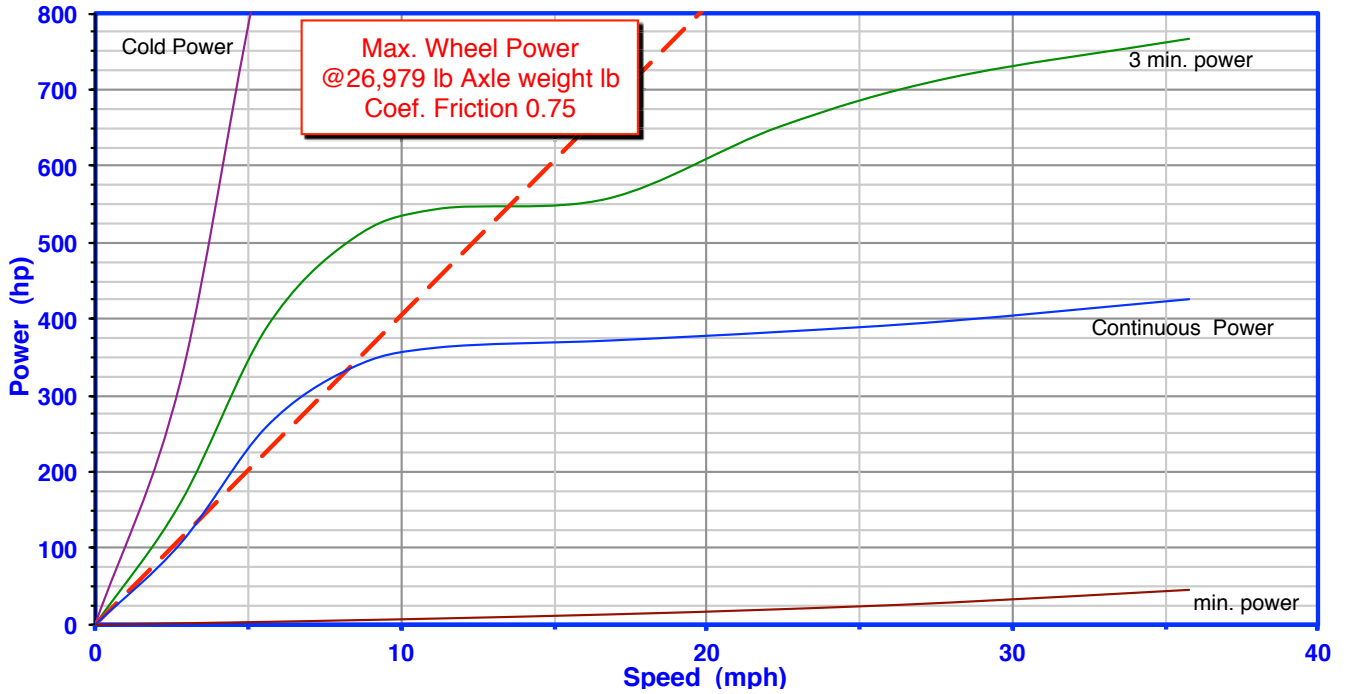


RS-60K Drawbar Pull
11.00 24.5 Tires, and 11.44:1 Drive Ratio

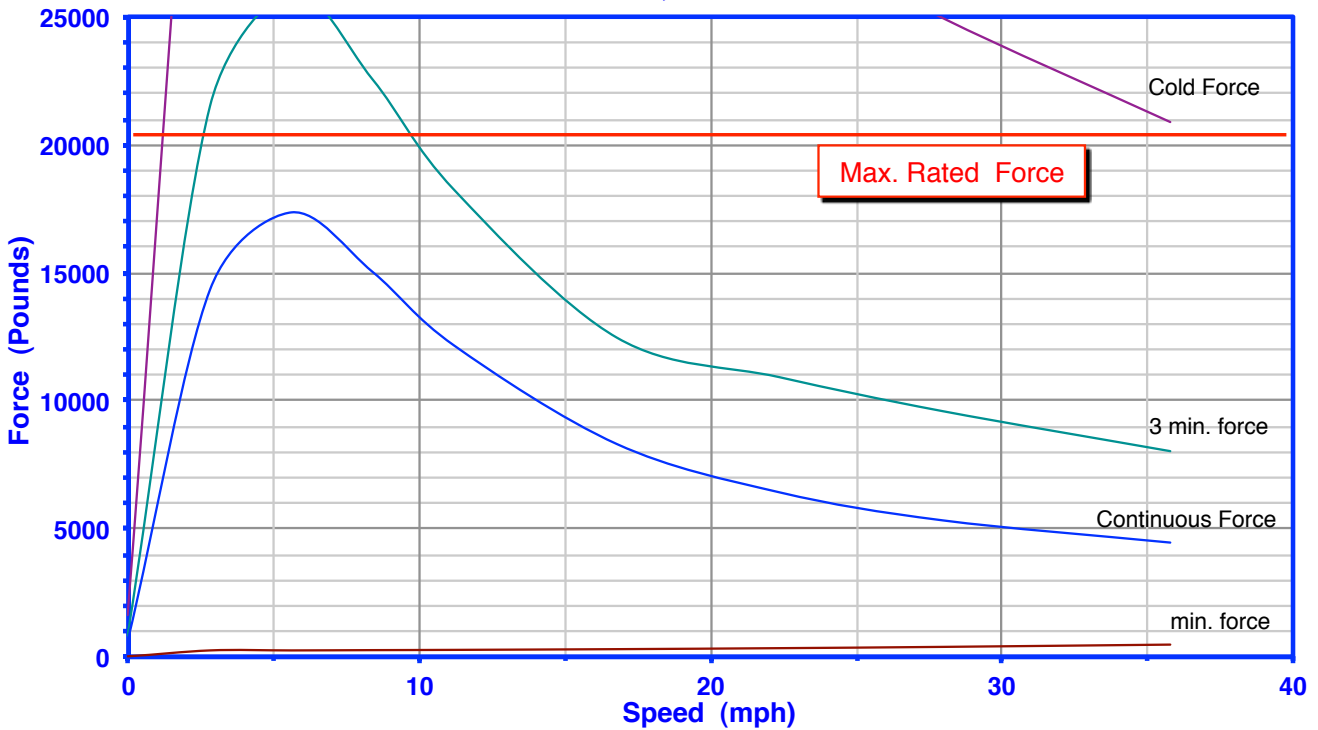

RS-60K Power Absorption
11.00 24.5 Tires and 11.44:1 Drive Ratio

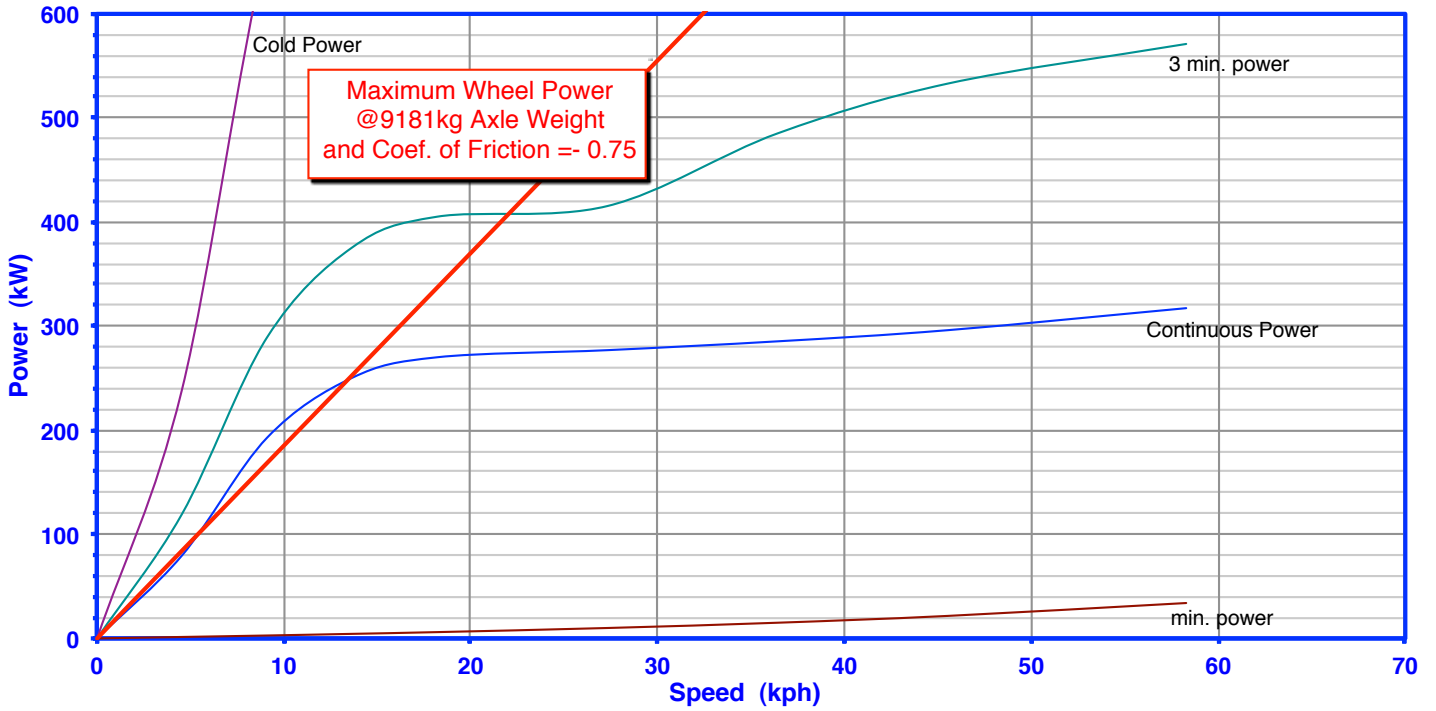

RS-60K Drawbar Force
11.00 24.5 Tires and 11.44:1 Drive Ratio

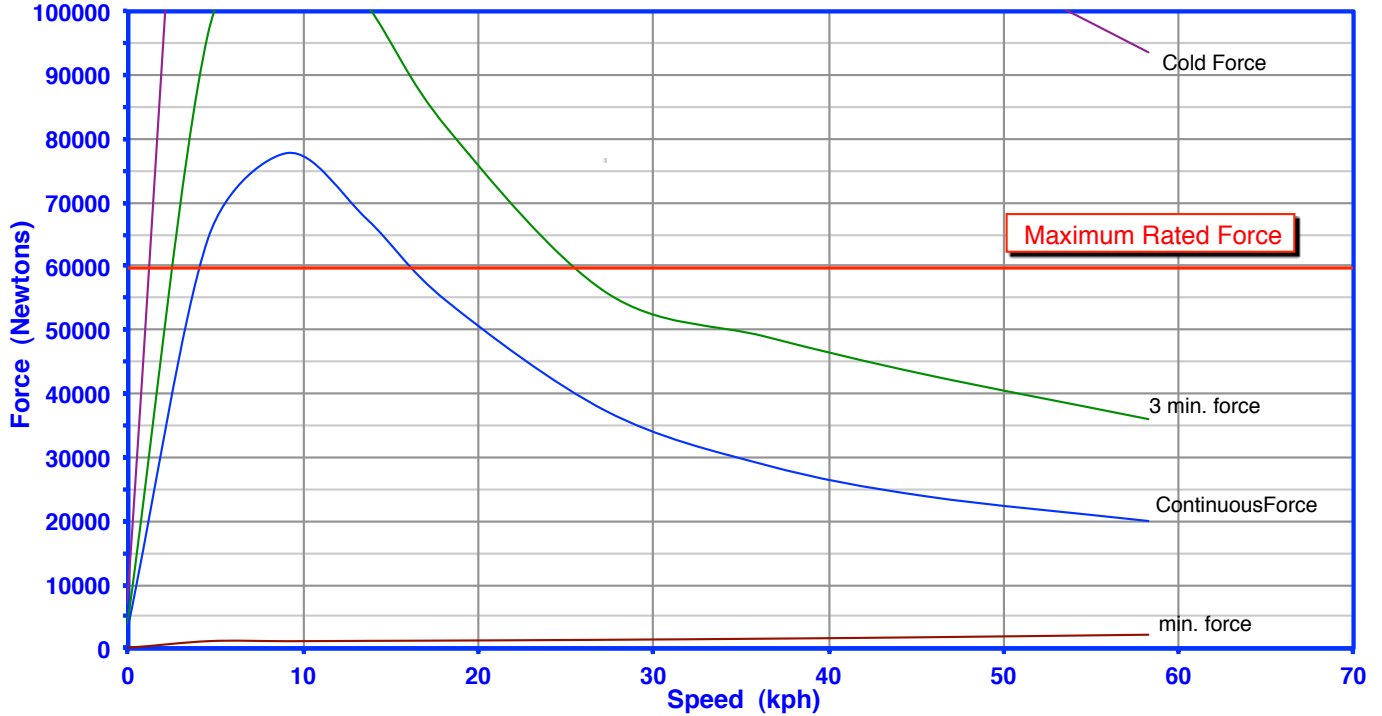

Everything you need to succeed

